

PROCEEDINGS



The Second International Conference on Science,
Engineering and Technology

“Sustainable Development in Developing
Country for Facing Industrial Revolution 4.0”

September 5-7, 2019

SKA Convention & Exhibition Center, Pekanbaru, Riau, Indonesia

Editors:

Arbi Haza Nasution
Evizal Abdul Kadir
Luiz Moutinho

Organizer :



Co-Organizers :



UNIVERSITI
TEKNOLOGI
MARA



Infrastructure
University
Kuala Lumpur

ICoSET 2019

Proceedings of the
Second International Conference on
Science, Engineering and Technology

Riau - Indonesia

September 5 - 7, 2019

Copyright © 2020 by SCITEPRESS – Science and Technology Publications, Lda.
All rights reserved

Edited by Arbi Haza Nasution, Evizal Abdul Kadir and Luiz Moutinho

Printed in Portugal

ISBN: 978-989-758-463-3

Depósito Legal: 473348/20

<http://icoset.uir.ac.id>

BRIEF CONTENTS

INVITED SPEAKERS	IV
ORGANIZING COMMITTEES	V
PROGRAM COMMITTEE	VI
FOREWORD	VII
CONTENTS	IX

INVITED SPEAKERS

Prof. EE-Peng Lim
Singapore Management University
Singapore

Assoc. Prof. Yuichi Sugai
Kyushu University
Japan

Prof. Ir. Dr Sharul Kamal Abdul Rahim
Universiti Teknologi Malaysia
Malaysia

Assoc. Prof. Dr. Norma binti Alias
Universiti Teknologi Malaysia
Malaysia

ORGANIZING COMMITTEES

GENERAL CHAIR

Dr. Arbi Haza Nasution, M.IT, Universitas Islam Riau, Indonesia

TECHNICAL PROGRAM CHAIR

Dr. Evizal Abdul Kadir, ST., M.Eng, Universitas Islam Riau, Indonesia

GENERAL CO-CHAIR

Dr. Eng. Muslim, ST., MT, Universitas Islam Riau, Indonesia

EDITORIAL CHAIR

Yudhi Arta, S.Kom., M.Kom, Universitas Islam Riau, Indonesia

STEERING COMMITTEE

Prof. Josaphat Tetuko Sri Sumantyo, Ph.D, Chiba University, Japan
Prof. Ir. Dr. Sharul Kamal Abdul Rahim, Universiti Teknologi Malaysia, Malaysia
Prof. Toru Ishida, Kyoto University, Japan
Prof. Ee-Peng Lim, Singapore Management University, Singapore
Prof. Dr. H Syafrinaldi SH, MCL, Universitas Islam Riau, Indonesia

PUBLICATION AND RELATIONSHIP CHAIR

Dr. Syafrjadi, S.H., M.H., Universitas Islam Riau, Indonesia

FINANCIAL CHAIR

Ause Labellapansa, ST., M.Cs., M.Kom., Universitas Islam Riau, Indonesia

EDITORIAL BOARD

Putra Efri Rahman, S.Kom, Universitas Islam Riau, Indonesia
Khairul Umam Syaliman, S.T., M.Kom., Politeknik Caltex Riau, Indonesia
Winda Monika, S.Pd., M.Sc., Universitas Lancang Kuning, Indonesia
Panji Rachmat Setiawan, S.Kom., M.M.S.I., Universitas Islam Riau, Indonesia
Rizdqi Akbar Ramadhan, S.Kom., M.Kom., Universitas Islam Riau, Indonesia
Anggiat, Universitas Islam Riau, Indonesia
Arif Lukman Hakim, Universitas Riau, Indonesia

PROGRAM COMMITTEE

- Prof. Dr. Tengku Dahril, M.Sc.**, Universitas Islam Riau, Indonesia
- Prof. Dr. Hasan Basri Jumin, M.Sc.**, Universitas Islam Riau, Indonesia
- Prof. Dr. Sugeng Wiyono, MMT**, Universitas Islam Riau, Indonesia
- Prof. Zainal A. Hasibuan, MLS., Ph.D.**, University of Indonesia, Indonesia
- Prof. Josaphat Tetuko Sri Sumantyo, Ph.D.**, Chiba University, Japan
- Prof. Dr. Eko Supriyanto**, Universiti Teknologi Malaysia, Malaysia
- Prof. Dr. Zailuddin Arifin**, Universiti Teknologi MARA, Malaysia
- Prof. Jhon Lee, B.Sc, M.Sc., Ph.D.**, Kyungdong University, Korea
- Prof. Ahmed A. Al Absi**, Kyungdong University, Korea
- Prof. Wisup Bae, Ph.D.**, Sejong University, Korea
- Prof. Kyuro Sasaki**, Kyushu University, Japan
- Prof. Adiwijaya**, Telkom University, Indonesia
- Prof. Ir. Asep Kurnia Permadi, M. Sc, Ph.D.**, Institut Teknologi Bandung, Indonesia
- Assoc. Prof. Dr. Azhan Hashim Ismail**, Universiti Teknologi MARA, Malaysia
- Assoc. Prof. Yuichi Sugai**, Kyushu University, Japan
- Assoc. Prof. Dr. Sonny Irawan**, Universiti Teknologi Petronas, Malaysia
- Assoc. Prof. Hussein Hoteit**, King Abdullah University of Science and Technology, Saudi Arabia
- Assoc. Prof. Dr. Anas Puri, ST., MT**, Universitas Islam Riau, Indonesia
- Kuen-Song Lin, Ph.D.**, Yuan Ze University, Taiwan
- Dr. Shukor Sanim Mohd Fauzi**, Universiti Teknologi MARA, Malaysia
- Dr. Inkyo Cheong**, Inha University, Korea
- Ahn, Young Mee, Ph.D.**, Inha University, Korea
- Hitoshi Irie, Ph.D.**, Chiba University, Japan
- Julie Yu-Chih Liu, Ph.D.**, Yuan Ze University, Taiwan
- Liang Chih Yu, Ph.D.**, Yuan Ze University, Taiwan
- Chia-Yu Hsu, Ph.D.**, Yuan Ze University, Taiwan
- Dr. Amit Pariyar**, University Malaysia Sarawak, Malaysia
- Dr. Madi Abdullah Naser**, Sebha University, Libya
- Dr. Nguyen Xuan Huy**, Ho Chi Minh City University of Technology, Vietnam
- Dr. Chunqiu Li**, Beijing Normal University, China
- Dr. Goh Thian Lai**, Universiti Kebangsaan Malaysia, Malaysia
- Dr. Syahrir Ridha**, Universiti Teknologi Petronas, Malaysia
- Dr. Kemas Muslim L.**, Telkom University, Indonesia
- Dr. Moch. Arif Bijaksana**, Telkom University, Indonesia
- Dr. Satria Mandala**, Telkom University, Indonesia
- Dr. Wahyudi Sutopo**, Solo State University, Indonesia
- Dr. Zulfatman**, University of Muhammadiyah Malang, Indonesia
- Dr. Suranto AM**, UPN Veteran Yogyakarta, Indonesia
- Dr. Eng. Husnul Kausarian, B.Sc (Hons)., M.Sc.**, Universitas Islam Riau, Indonesia

FOREWORD

In the name of Allah, Most Gracious, Most Merciful
Assalamu'alaikum Wr. Wb.,

Welcome to the Second International Conference on Science Engineering and Technology (ICoSET 2019). The advancement of today's computing technology, science, engineering and industrial revolution 4.0 play a big role in the sustainable development of social, economic, education, and humanity in developing countries. Institute of higher education is one of many parties that need to be involved in the process. Academicians and researchers should promote the concept of sustainable development. The Second International Conference on Science, Engineering and Technology (ICoSET 2019) is organized to gather researchers to disseminate their relevant work on science, engineering and technology. The conference is co-located with The Second International Conference on Social, Economy, Education, and Humanity (ICoSEEH 2019) at SKA Co-EX Pekanbaru Riau.

I would like to express my hearty gratitude to all participants for coming, sharing, and presenting your research at this joint conference. There is a total of 84 manuscripts submitted to ICoSET 2019. However only high-quality selected papers are accepted to be presented in this event, with the acceptance rates of ICoSET 2019 is 70%. We are very grateful to all steering committees and both international and local reviewers for their valuable work. I would like to give a compliment to all co-organizers, publisher, and sponsors for their incredible supports.

Organizing such prestigious conferences was very challenging and it would be impossible to be held without the hard work of the program committee and organizing committee members. I would like to express my sincere gratitude to all committees and volunteers from Singapore Management University, Kyoto University, Kyushu University, University of Tsukuba, Khon Kaen University, Ho Chi Minh City University of Technology, University of Suffolk, Universiti Teknologi Malaysia, Infrastructure University Kuala Lumpur, Universiti Malaya, Universiti Kebangsaan Malaysia, Universiti Utara Malaysia, Universiti Teknologi Mara, and Universiti Pendidikan Indonesia for providing us with so much support, advice, and assistance on all aspects of the conference. We do hope that this event will encourage collaboration among us now and in the future.

We wish you all find the opportunity to get rewarding technical programs, intellectual inspiration, and extended networking.

Pekanbaru, 27th August 2019
Dr. Arbi Haza Nasution, M.IT
Chair of ICoSET 2019

CONTENTS

PAPERS

FULL PAPERS

- Design of Community-based Ecotourism at Cengkehan and Giriloyo, Wukirsari Village, Imogiri District, Bantul Regency, Special Region of Yogyakarta
Suhartono, Sri Mulyaningsih, Desi Kiswiranti, Sukirman, Nurwidi A. A. T. Heriyadi, Muchlis and Iva Mindhayani 5
- Prototype Storage Locker Security System based on Fingerprint and RFID Technology
Apri Siswanto, Hendra Gunawan and Rafiq Sanjaya 11
- Feasibility Study of CO₂ Flooding under Gross-split Mechanism: Simulation Approach
Muslim Abdurrahman, Wisup Bae, Adi Novriansyah, Dadan Damayandri and Bop Duana Afrireksa 15
- Online Classroom Attendance System based on Cloud Computing
Sri Listia Rosa and Evizal Abdul Kadir 20
- Analysis of Porosity and Permeability on Channel Deposit Sandstone using Pore-gas Injection and Point Counting in Sarilamak Area, West Sumatra
Bayu Defitra, Tiggi Choanji and Yuniarti Yuskar 26
- A Simulation Study of Downhole Water Sink Guidelines Plot Application using Real Field Data
Praditya Nugraha 31
- Groundwater Exploration using 2D Electrical Resistivity Imaging (ERI) at Kulim, Kedah, Malaysia
Adi Suryadi, Muhammad Habibi, Batara, Dewandra Bagus Eka Putra and Husnul Kausarian 35
- Risk Identification in Management System Process Integration Which Have Impact on the Goal of Management System Components
Nastasia Ester Siahaan, Leni Sagita and Yusuf Latief 41
- The Performance of 3D Multi-slice Branched Surface Reconstruction on CPU-GPU Platform
Normi Abdul Hadi and Norma Alias 49
- Tile-based Game Plugin for Unity Engine
Salhazan Nasution, Arbi Haza Nasution and Arif Lukman Hakim 55
- Image Segmentation of Nucleus Breast Cancer using Digital Image Processing
Ana Yulianti, Ause Labellapansa, Evizal Abdul Kadir, Mohana Sundaram and Mahmud Othman 64
- An Integrated Framework for Social Contribution of Diabetes Self-care Management Application
Zul Indra, Liza Trisnawati and Luluk Elvitaria 68
- Spatiotemporal Analysis of Urban Land Cover: Case Study - Pekanbaru City, Indonesia
Idham Nugraha, Faizan Dalilla, Mira Hafizhah Tanjung, Rizky Ardiansyah and M. Iqbal Hisyam 74
- The Effectiveness of Rice Husk Biochar Application to Metsulfuron Methyl Persistence
Subhan Arridho, Saripah Ulpah and Tengku Edy Sabli 80
- Digital Forensics: Acquisition and Analysis on CCTV Digital Evidence using Static Forensic Method based on ISO /IEC 27037:2014
Rizdqi Akbar Ramadhan, Desti Mualfah and Dedy Hariyadi 85

Testing the Role of Fish Consumption Intention as Mediator <i>Junaidi, Desi Ilona, Zaitul and Harfiandri Damanhuri</i>	90
Segmentation of Palm Oil Leaf Disease using Zoning Feature Extraction <i>Ause Labellapansa, Ana Yulianti and Agus Yuliani</i>	98
Analysis of Economy in the Improvement of Oil Production using Hydraulic Pumping Unit in X Field <i>Muhammad Ariyon, Novia Rita and Tribowo Setiawan</i>	102
Construction Design and Performance of Dry Leaf Shredder with Vertical Rotation for Compost Fertilizer <i>Syawaldi</i>	109
The Impact of Additively Coal Fly Ash toward Compressive Strength and Shear Bond Strength in Drilling Cement G Class <i>Novrianti, Dori Winaldi and Muhammad Ridho Efras</i>	114
Impact of Vibration of Piling Hammer on Soil Deformation: Study Case in Highway Construction Section 5 Pekanbaru-Dumai <i>Firman Syarif, Husnul Kausarian and Dewandra Bagus Eka Putra</i>	120
Combination Playfair Cipher Algorithm and LSB Steganography for Data Text Protection <i>Apri Siswanto, Sri Wahyuni and Yudhi Arta</i>	125
Fire Detection System in Peatland Area using LoRa WAN Communication <i>Evizal Abdul Kadir, Hitoshi Irie and Sri Listia Rosa</i>	130
Forest Fire Monitoring System using WSNs Technology <i>Evizal Abdul Kadir, Sri Listia Rosa and Mahmud Othman</i>	135
Multi Parameter of WSNs Sensor Node for River Water Pollution Monitoring System (Siak River, Riau-Indonesia) <i>Evizal Abdul Kadir, Abdul Syukur, Bahruddin Saad and Sri Listia Rosa</i>	140
Analysis for Gerund Entity Anomalies in Data Modeling <i>Des Suryani, Yudhi Arta and Erdisna</i>	146
The Incidence of Rhinoceros Beetle Outbreak in Public Coconut Plantation in Tanjung Simpang Village, Indragiri Hilir, Riau Province <i>Saripah Ulpah, Nana Sutrisna, Fahroji, Suhendri Saputra and Sri Swastika</i>	151
Mobile Application of Religious Activities for the Great Mosque Islamic Center Rokan Hulu with Push Notification <i>Salhazan Nasution, Arbi Haza Nasution and Fitra Yamita</i>	155
An Augmented Reality Machine Translation Agent <i>Arbi Haza Nasution, Yoze Rizki, Salhazan Nasution and Rafi Muhammad</i>	163
The Community Perception of Traditional Market Services in Pekanbaru City, Riau Province <i>Puji Astuti, Syaifullah Rosadi, Febby Asteriani, Eka Surya Pratiwi and Thalia Amanda Putri</i>	169
Separation of Crude Oil and Its Derivatives Spilled in Seawater by using Cobalt Ferrite Oxide <i>Mohammed A, Samba, Ibrahim Ali Amar, Musa Abuadabba, Mohammed A. Alfroji, Zainab M. Salih and Tomi Erfando</i>	175

Study of Open Space Utilization in Pekanbaru City, Riau Province <i>Mira Hafizhah T., Febby Asteriani, Mardianto and Angelina Rulan S.</i>	182
Application of Augmented Reality as a Multimedia Learning Media: Case Study of Videography <i>Ahmad Zamsuri, Fadli Suandi and Rizki Novendra</i>	188
Green Building Performance Analysis in the Stimi Campus Building <i>Dian Febrianti and Samsunan</i>	194
Towing Service Ordering System based on Android: Study Case - Department of Transportation, Pekanbaru <i>Panji Rachmat Setiawan, Yudhi Arta and Rendi Sutisna</i>	200
Biosurvey of Mercury (Hg), Cadmium (Cd), and Lead (Pb) Contamination in Reclamation Island-Jakarta Bay <i>Salmi Salma, Achmad Sjarmidi and Salman</i>	205
Expert System to Detect Early Depression in Adolescents using DASS 42 <i>Nesi Syafitri, Yudhi Arta, Apri Siswanto and Sonya Parlina Rizki</i>	211
Geotechnics Analysis: Soil Hardness on Stability of Davit Kecil's Weir in Ulu Maras, Kepulauan Anambas, Kepulauan Riau <i>Miftahul Jannah, Dewandra Bagus Eka Putra, Firman Syarif, Joni Triparadi, Nopiyanto and Husnul Kausarian</i>	219
Support for Heritage Tourism Development: The Case of Ombilin Coal Mining Heritage of Sawahlunto, Indonesia <i>Jonny Wongso, Desi Ilona, Zaitul and Bahrul Anif</i>	229
Aerial Photogrammetry and Object-based Image Analysis for Bridge Mapping: A Case Study on Bintan Bridge, Riau Islands, Indonesia <i>Husnul Kausarian, Muhammad Zainuddin Lubis, Primawati, Dewandra Bagus Eka Putra, Adi Suryadi and Batara</i>	237
Monitoring Single Site Verification (SSV) System and Optimization BTS Network based on Android <i>Abdul Syukur, Siti Rahmadhani Sabri and Yudhi Arta</i>	243
Characterization of the Ethnobotany of Riau Province Mascot Flora (<i>Oncosperma tigillarum</i> (Jack) Ridl.) <i>Desti, Fitmawati, Putri Ade Rahma Yulis and Maya Novaliza Isda</i>	250
Effect Stocking Density on Growth and Survival rate of Larval Selais Fish (<i>Kryptopterus lois</i>) Cultured in Recirculation System <i>Agusnimar Muchtar and Rosyadi</i>	254
Development of Safety Plan to Improve OHS (Occupational Health and Safety) Performance for Construction of Dam Supporting Infrastructure based on WBS (Work Breakdown Structure) <i>Aprilia Dhiya Ulhaq, Yusuf Latief and Rossy Army Machfudiyanto</i>	258
Design of Web Login Security System using ElGamal Cryptography <i>Yudhi Arta, Hendra Pratama, Apri Siswanto, Abdul Syukur and Panji Rachmat Setiawan</i>	268
Standard Operational Procedures Development for Government Building's Care and Maintenance Work of Outer Spatial and Housekeeping Component to Improve Work Effectiveness and Efficiency using Risk-based Approach <i>Lasita Khaerani, Yusuf Latief and Rossy Army Machfudiyanto</i>	274

A Novel Correlation on MMP Prediction in CO ₂ -LPG Injection System: A Case Study of Field X in Indonesia <i>Prasandi Abdul Aziz, Hendra Dwimax, Tutuka Ariadji, Steven Chandra, Wijoyo Niti Daton and Ressi Bonti</i>	285
Productivity Analysis of Frac-pack Completion in M Well with Sand Problem Indication and High Permeability Formation <i>Herianto, Prasandi Abdul Aziz, Wijoyo Niti Daton and Steven Chandra</i>	291
Emulsion Treatment using Local Demulsifier from Palm Oil <i>Tom Erfando and Emre Fathan</i>	299
Designing an IoT Framework for High Valued Crops Farming <i>Domingo Junior P. Ngipol and Thelma D. Palaoag</i>	304
Consideration of the Different Pile Length Due to Soil Stress and Inner Forces of the Nailed-slab Pavement System under Concentric Load <i>Anas Puri, Roza Mildawati and Muhammad Solihin</i>	311
Utilization of Agricultural Waste to Be Bioethanol Sources as a Solvent on Paraffin Wax Crude Oil Issues <i>M. K. Afdhol, F. Hidayat, M. Abdurrahman, H. Z. Lubis, R. K. Wijaya and N. P. Sari</i>	315
The Effect of Regeneration Time of Biomass Activated Carbon using Low Temperature to Reduce Filtration Loss in Water-based Drilling Fluid <i>Nur Hadziqoh, Mursyidah, Arif Rahmadani, Idham Khalid and Hasnah Binti Mohd Zaid</i>	322
Improving the Accuracy of Features Weighted k-Nearest Neighbor using Distance Weight <i>K. U. Syaliman, Ause Labellapansa and Ana Yulianti</i>	326
Predicting of Oil Water Contact Level using Material Balance Modeling of a Multi-tank Reservoir <i>Muslim Abdurrahman, Bop Duana Afireksa, Hyundon Shin and Adi Novriansyah</i>	331
Chip Formation and Shear Plane Angle Analysis on Carbon Steel Drilling using Solid Carbide Tools <i>Rieza Zulrian Aldio</i>	337
A Solution to Increase Natuna D Alpha's Resource Utilization by Cryogenic Distillation: Conceptual Design & Sensitivity Study <i>Wijoyo Niti Daton, Ezra Revolin, Siptian Nugrahawan, Prasandi Abdul Aziz, Tutuka Ariadji, Steven Chandra and J. A. Nainggolan</i>	342
Design of Volcanic Educational-based Natural Tourism at Giriloyo, Wukirsari Village, Imogiri District, Bantul Regency, Yogyakarta-Indonesia <i>Sri Mulyaningsih</i>	349
Four Types of Moral Holistic Values for Revolutionizing the Big Data Analytics in IoT-based Applications <i>Norma Alias</i>	357
AUTHOR INDEX	363

Feasibility Study of CO₂ Flooding under Gross-split Mechanism: Simulation Approach

Muslim Abdurrahman¹, Wisup Bae², Adi Novriansyah¹, Dadan Damayandri³ and Bop Duana Afireksa⁴

¹*Department of Petroleum Engineering, Universitas Islam Riau, Pekanbaru, Indonesia*

²*Sejong University, South Korea*

³*LEMIGAS, Indonesia*

⁴*Inha University, South Korea*

{muslim, adinovriansyah}@eng.uir.ac.id, wsbae@sejong.ac.kr, anba11181@gmail.com, afireksa@inha.edu

Keywords: CO₂, Simulation Study, WAG, Gross Split, NPV

Abstract: Importance of Carbon Dioxide (CO₂) injection into the subsurface reservoir is essential since the concern of global warming and climate change issues in Indonesia. Selecting the oil reservoir as a candidate for a storage site is an attractive option due to CO₂ gas utilization is effective for Enhanced Oil Recovery (EOR) purpose. Continuous and Water-Alternating-Gas (WAG) CO₂ flooding are the most commonly applied scenarios in the oil and gas industries. Considering the EOR side, choosing an appropriate scenario is mandatory for cost efficiency reason and influences the oil share amount between the Indonesian Government and operator under the gross-split mechanism. Therefore, by using a simulation approach, the feasibility of continuous and WAG CO₂ injection is observed to decide the most financially attractive choice. Simulation results reveal a WAG scenario recovers slightly more oil compare to continuous injection scheme. Application of gross-split under base-share makes both injection strategies unattractive for investors. An adjustment of government-contractor share is required to improve the feasibility of the project.

1 INTRODUCTION

As a part of greenhouse gas (GHG) pollutant, Carbon Dioxide (CO₂) emission issue becomes a major concern of major countries. Through The Kyoto Protocol and Paris Agreement, most countries agreed to reduce CO₂ emission level before 2050 due to avoid the catastrophic effect of global warming and climate change phenomena. Carbon Capture and Storage (CCS) is the only effective scheme to overcome this problem (Agency, 2016). However, storing CO₂ in the aquifer is not financially satisfied since CO₂ is injected into the storage site without gaining any benefit during this activity. This story may sound interesting if CO₂ storage is performed in an oil reservoir.

Besides act as a storage site, injecting CO₂ in oil reservoir may bring another benefit in form oil production enhancement, commonly known as CO₂-Enhanced Oil Recovery (CO₂-EOR). CO₂-EOR has successfully implemented in North America for more than a decade, either using the natural or

anthropogenic source (Whittaker et al., 2011; Jishun et al., 2015). Mostly CO₂ Flooding Targets crude oil contains high intermediate component because the miscible condition of CO₂ and crude oil can be achieved under reservoir condition (Abedini and Torabi, 2014). Minimum Miscibility Pressure (MMP) determination is mandatory in designing the injection scenario. MMP can be determined through slim-tube, swelling, vanishing interfacial tension, and rising bubble experiments. Moreover, PVT and slimtube simulation methods are capable to estimate MMP with a reasonable gap with experimental work (Abdurrahman et al., 2015).

Besides MMP, Deciding the injection scheme is also important for CO₂ flooding because it relates to the efficiency of CO₂ utilization in displacing residual oil. In terms of CO₂ utilization factor. Statistically, more than one barrel (bbl) Oil can be produced by injecting 1 million standard cubic feet of CO₂ (Azzolina et al., 2015). CO₂ utilization factor implicitly has an effect to the feasibility of the CO₂ flooding project because it correlates to how

much CO₂ gas should be provided, i.e., how much fund is required for purchasing CO₂ or constructing CO₂ anthropogenic capture facilities. Deciding to use CO₂ from CCS activity potentially reduce the CCS cost itself (Rubin et al., 2015). Therefore, CO₂-EOR, either from natural or anthropogenic, i.e., from CCS, may bring a financial interest if properly implemented, including the injection scheme selection.

Deciding the most suitable scheme of CO₂ flooding is risky and relates to the oil share between the Indonesian government and operator because Indonesia adopts production share mechanism. Indonesia adopted a relatively new oil share mechanism, known as gross-split. This mechanism is officially introduced and effectively valid since 2017. This new mechanism still has to be improved because indicating an undesirable profit for the operator, feasibility study of CO₂ by considering injection scheme under gross-split mechanism is another interesting topic for the researchers (Irham and Julyus, 2018).

This Paper analyses under simulation method the feasibility of CO₂ flooding scheme by using gross-split mechanism. Two injection strategies, CO₂ Continuous injection and CO₂ Water Alternating Gas (WAG) are compared their capability in recovering residual oil after primary stage and also feasibility during CO₂ flooding stage. Mathematical model represents one of Indonesia oil field condition was generated by using BUILDER generator and simulated under GEM simulator. Both of these modules are licensed under CMG Software. Results from the GEM simulator will be analyzed its feasibility for each injection scenario. Injection scenario is decided by considering the economic parameter such as NPV and IRR.

2 METHODOLOGY

The reservoir grid model from Indonesia oil field is used for demonstrating the field-scale CO₂ flooding in this study. This grid model consists of more than 7,800 cells with 56, 46, and 3 cells along x, y, and z directions (represented as i, j, and k in the software). Figure 1 shows the grid model with its grid-top parameter. The average permeability is quite low, ranged from 30 to 100 millidarcy (md). The range of porosity of 0.13 to 0.19. The pore-volume of this model is 0.83 billion reservoir cubic feet (cuft). Figure 2 and 3 depict the relative permeability (k_r) plot for water-oil and gas-oil systems, respectively. The relative permeability model in this study is

obtained directly simulation study (Millah, 2014). In the oil-water system, k_r is plotted over water saturation (s_w) and gas saturation (s_g) for gas- oil system. Subscript o, w, and g in figure 2 and 3 are oil, water, and gas. Twelve injectors are planned to inject CO₂ under continuous and WAG scenarios and the performance will be analyzed based on production data on 5 production wells (location of the wells are shown in Figure. 4). Total injection volume is limited on 0.6 PV due to economic reason and the 1:1 WAG ratio is selected because this ratio is common in field-scale operation (Christensen et al., 1998). 2% Half Cycle Slug Size (HCSS) is designed for this study. Configuration of CO₂ and water injection rate are tabulated in Table 1.

The model is simulated from 1996 until the end of 2013 for primary recovery stage and continued to 10 years CO₂ flooding under scenario in Table 1 until the injection period is finished (2024). The oil production during this CO₂ flooding simulation is recorded for feasibility calculation.

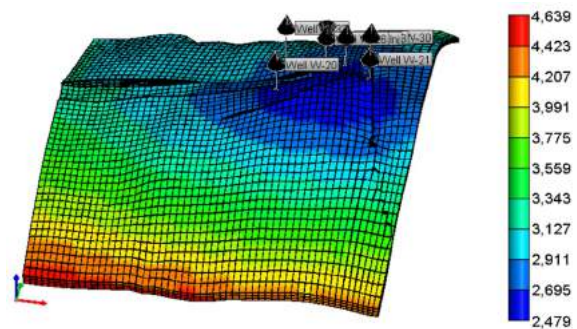


Figure 1: The grid model that is used in this study, the color legend represents the grid top of the cell in feet unit.

Table 1: Gas and water injection rate in CO₂ flooding scenarios. “Mscf” means thousand standard cubic feet.

Injection Scenario	Gas Rate (Mscf/day)	Water rate (bbl/day)
Continuous CO ₂ injection	1463	-
WAG	1463	1873

Figure 5 draws Schematic share diagram of Gross Split between government and operator (mentioned as “contractor” in this diagram). The difference of this new mechanism with previously cost-recovery mechanisms is the contractor must bear every operating cost, risk, and all taxes. The government and contractor shares are divided from the gross oil production while in the cost recovery mechanism, the oil should be shared to both parties after deducted from cost recovery post. Three variable influences the share of government and contractor, e.g., Base split, variable component, and progressive component

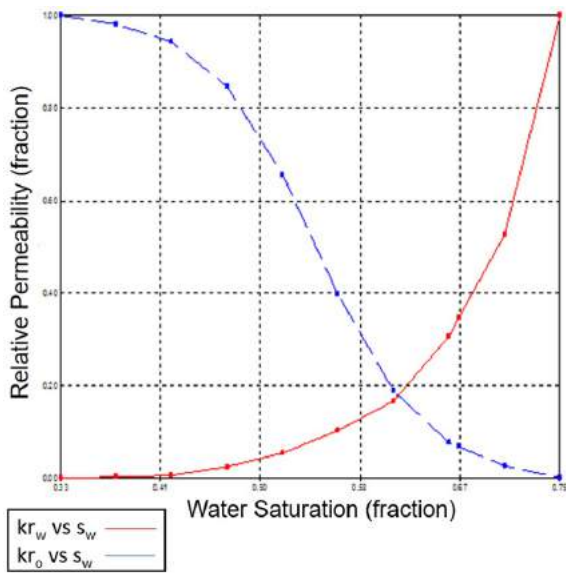


Figure 2: Relative permeability curve for water-oil system.

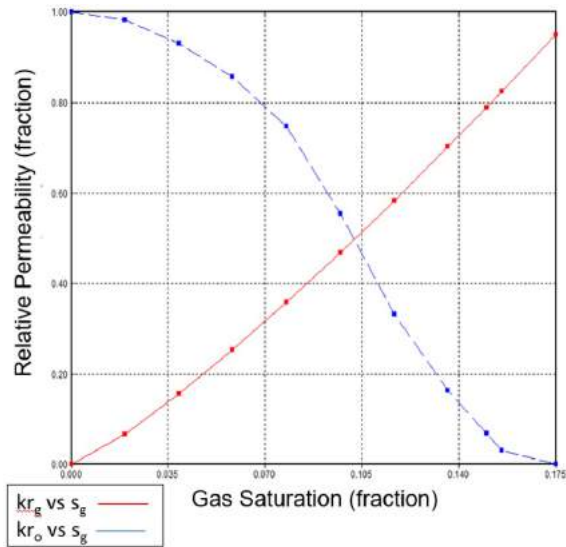


Figure 3: Relative permeability curve for gas-oil system.

(Giranza and Bergman, 2018). These variables are affected by field condition, development status, and oil price (Roach and Dunstan, 2018).

Several assumption will be made for studying the feasibility of CO₂ flooding project in this field. The oil price for this study is assumed 90 US\$/bbl and the share for government and contractor is under base split (57% - 43%). Moreover, the Indonesian tax is assumed 45% (Roach and Dunstan, 2018). All cost and revenue components in this study are tabulated in Table 2, based on study of Jarrel et al. (2002). This study also utilized recycled CO₂ and water from the recycling facilities whereby the annual handling

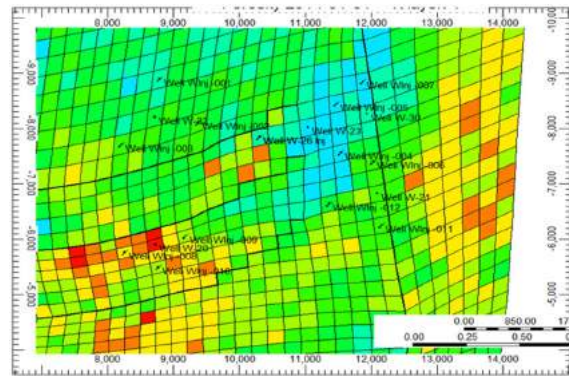


Figure 4: Distribution of injection and production wells in the grid model.

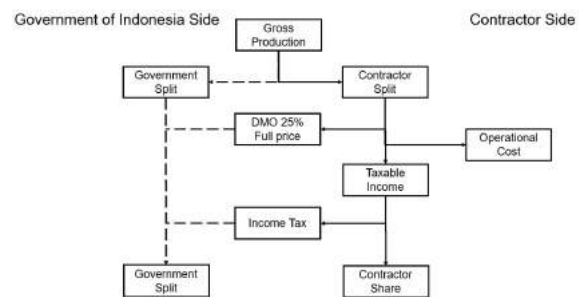


Figure 5: Schematic diagram of Indonesia gross-split mechanism.

capacity of which are 18 MMSCF CO₂ and 730 thousand barrels of water. The Weighing average cost of capital (WACC) for this study is 12%. Net Present Value (NPV) of each scenario is will be compared.

3 RESULT AND DISCUSSION

Figure 6 compares the annual production during 10 years continuous CO₂ Flooding and WAG, while the cumulative production on each scenario are plotted

Table 2: Cost and revenue components assumptions in this study.

Cost or revenue components	Value
Injection well cost	0.600 MMUS\$/well
Production well cost	0.450 MMUS\$/well
Well completion	0.200 MMUS\$
Water injection capital cost	0.011 MMUS\$/well
CO ₂ facility capital cost	0.012 MMUS\$/well
Production facility capital cost	0.027 MMUS\$/well
Water Injection Cost	1.000 US\$/bbl
CO ₂ Price	2.500 US\$/Mscf
Chemical Cost	0.020 MMUS\$/well/yr.
CO ₂ recycle OPEX	0.750 US\$/mscf
Water Recycle OPEX	0.300 US\$/bbl
Oil Price	90 US\$/bbl

in Figure 7. Continuous CO₂ injection shows higher productivity over WAG during two years injection and gradually decrease for the rest period. It is contrast with performance under WAG scenario where the oil recovery is still low in the first year but significantly increase more than 120% in the second year. Productivity on WAG tend to show a stable trend for the next seven years. Results from the figure 7 indicates the WAG application can recover oil slightly more than continuous flooding scenario with 1% recovery gap, i.e. the 10-years oil recovery is same. In terms of CO₂ utilization factor, a ratio of Injected CO₂ to the amount of oil production, simulation results shows low CO₂ utilization factor is revealed for WAG scenario, means requires less CO₂ to produce one barrel of oil. Comparing the data trends on both scenarios clearly indicates a continuous growth of CO₂ utilization factor, indicates the requirement to produce crude oil becomes higher over the time, while WAG shows a decreasing trend. WAG is effective to overcome the gravity segregation issue, compare to continuous CO₂ flooding. Due to lower density. CO₂ tend to move upwards in the reservoir, resulting a poor displacement efficiency (Jaafar et al., 2014),

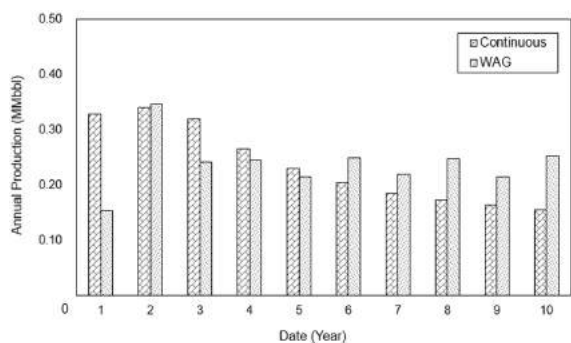


Figure 6: Annual oil production during CO₂ flooding phase for each scenario.

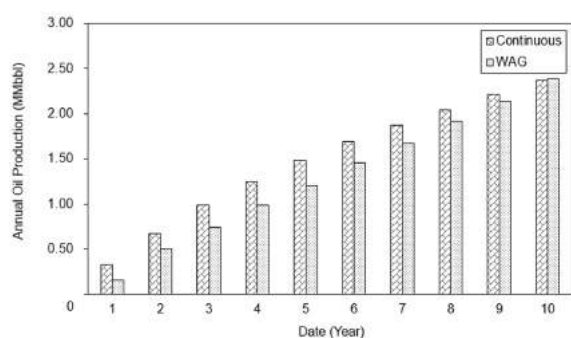


Figure 7: Annual Cumulative oil production during CO₂ flooding phase for each scenario.

Despite both injection strategies shows same achievement in term of oil recovery, WAG option

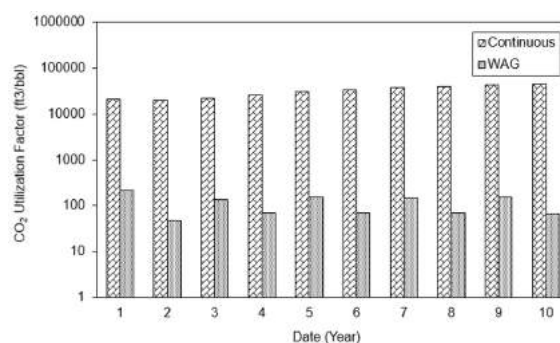


Figure 8: Annual CO₂ utilization factor for continuous and WAG CO₂ flooding.

is more attractive because consume less CO₂ inducing low CO₂ Purchase cost. Comparing these scenarios under gross-split mechanism reveal unprofitable conclusion, as indicates in negative value of NPV (Figure 9). Therefore, base-share between government and contractor is not feasible from the contractor side, means share adjustment between these shareholders are required. The government-contractor share is then adjusted to 35%-65% because these share is suitable for high operating cost, i.e., both CO₂ flooding scenarios are categorized into high operating cost projects (Roach and Dunstan, 2018). Recalculation of NPV under this new share results negative NPV for continuous injection project (-30.5 MM\$) and 6.9 MM\$ for WAG, means WAG scenario is more profitable. Moreover, the Internal Rate of Return (IRR) of this project indicate a significant profit can be made during this injection period, i.e., the IRR is higher than Indonesia WACC (32.7% compare to 8%). In short, CO₂ WAG scenario is effective in displacing residual oil and also more profitable than another option. Share adjustment in this study may be an evidence on the urgency CO₂ issue in Indonesia gross-split mechanism. Therefore, it is recommended to include CO₂ issue into the variable and progressive share components.

The information shared to the all of communities. A monitor with all the information related to the water quality installed at the community center or at the point of common assembly of community for easy to delivery of information. Furthermore, all the people and community can have an access to information shows including the status of river water levels. Based on monitoring system then all the information is update for public service and knows the status of the river.

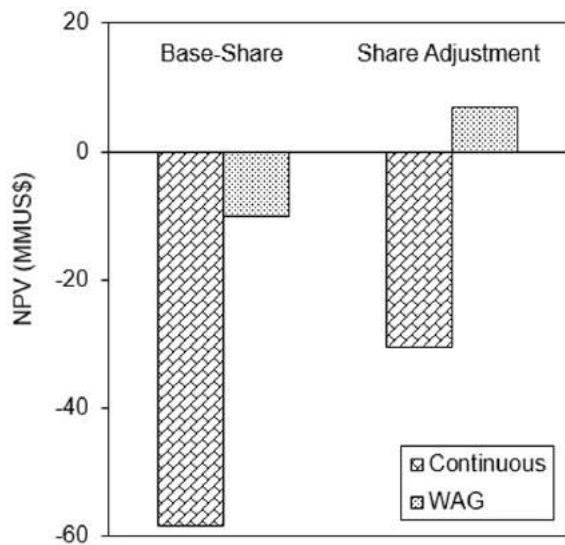


Figure 9: Effect of share adjustment to NPV for continuous and WAG CO₂ flooding.

4 CONCLUSIONS

This paper analyze the feasibility of CO₂ project under Indonesia gross split mechanism by using reservoir simulation method. One of Indonesia oil field reservoir is modelled for this study, where the CO₂ injection schemes is limited to continuous and WAG scenarios. Simulation results reveals a better performance of WAG in recovering remaining oil in the reservoir. Moreover, feasible indication is shown on WAG scheme after adjusting the base share of government and contractor. Including the CO₂ issues into the variable and progressive share, points may increase the tendency of CO₂ flooding application in Indonesia

REFERENCES

- Abdurrahman, M., Permadi, A., and Bae, W. (2015). An improved method for estimating minimum miscibility pressure through condensation–extraction process under swelling tests. *Journal of Petroleum Science and Engineering*, 131:165–171.
- Abedini, A. and Torabi, F. (2014). Oil recovery performance of immiscible and miscible co₂ huff-and-puff processes. *Energy & Fuels*, 28(2):774–784.
- Agency, I. E. (2016). *20 Years of Carbon Capture and Storage: Accelerating Future Deployment*. International Energy Agency.
- Azzolina, N. A., Nakles, D. V., Gorecki, C. D., Peck, W. D., Ayash, S. C., Melzer, L. S., and Chatterjee, S. (2015). Co₂ storage associated with co₂ enhanced

oil recovery: A statistical analysis of historical operations. *International Journal of Greenhouse Gas Control*, 37:384–397.

- Christensen, J. R., Stenby, E. H., Skauge, A., et al. (1998). Review of wag field experience. In *International petroleum conference and exhibition of Mexico*. Society of Petroleum Engineers.
- Giranza, M. and Bergman, A. (2018). Indonesia's new gross split psc: Is it more superior than the previous standard psc. *Journal of Economics, Business and Management*, 6.
- Irham, S. and Julyus, P. (2018). The new energy management policy: Indonesian psc-gross-split applied on steam flooding project. In *IOP Conference Series: Earth and Environmental Science*, volume 106, page 012109. IOP Publishing.
- Jaafar, M., Omar, S., Anuar, S., and Suradi, S. (2014). Reservoir monitoring of eor processes (wag, foam and polymer) using streaming potential. In *Scientific Cooperations International Workshops on Engineering Branches*, pages 8–9.
- Jarrell, P. M., Fox, C. E., Stein, M. H., and Webb, S. L. (2002). *Practical aspects of CO₂ flooding*, volume 22. Society of Petroleum Engineers Richardson, TX.
- Jishun, Q., Haishui, H., and Xiaolei, L. (2015). Application and enlightenment of carbon dioxide flooding in the united states of america. *Petroleum Exploration and Development*, 42(2):232–240.
- Roach, B. and Dunstan, A. (2018). The indonesian psc: the end of an era. *The Journal of World Energy Law & Business*, 11(2):116–135.
- Rubin, E. S., Davison, J. E., and Herzog, H. J. (2015). The cost of co₂ capture and storage. *International Journal of Greenhouse Gas Control*, 40:378–400.
- Whittaker, S., Rostron, B., Hawkes, C., Gardner, C., White, D., Johnson, J., Chalaturnyk, R., and Seeburger, D. (2011). A decade of co₂ injection into depleting oil fields: Monitoring and research activities of the iea ghg weyburn-midale co₂ monitoring and storage project. *Energy Procedia*, 4:6069–6076.

