



ScienceDirect®

2.3

CiteScore

[Submit your article](#)

[Guide for authors](#)

Menu



Search in this journal

SIE 2019: Sustainable & Integrated Engineering International Conference

Copyright © 2019 Elsevier Ltd. All rights reserved. Selection and peer-review under responsibility of the scientific committee of the SIE 2019: Sustainable & Integrated Engineering International Conference.

Edited by Zaini Ahmad, Agus Arsad, Arizu Sulaiman, Mohd Kamaruddin Abd Hamid

Volume 39, Part 2,

Pages 903-1102 (2021)

 [Download full issue](#)

[< Previous vol/issue](#)

[Next vol/issue >](#)

Receive an update when the latest issues in this journal are published

[Sign in to set up alerts](#)

Research article Abstract only

FEEDBACK 

Sterilization of oyster mushroom crop residue substrate by using cold plasma technology

Linda Agun, Norhayati Ahmad, Norizah Redzuan, Nor Azyan Syahirah Idirs, ... Raja Kamarulzaman Raja Ibrahim

Pages 903-906

[Purchase PDF](#) Article preview 

Research article Abstract only

Evaluation of dyes removal by beta-cyclodextrin adsorbent

Noor Suhailah Sulaiman, Muhammad Abbas Ahmad Zaini, Agus Arsad

Pages 907-910

[Purchase PDF](#) Article preview 

Research article Abstract only

Green concrete composites production comprising metalized plastic waste fibers and palm oil fuel ash

Rayed Alyousef, Hossein Mohammadhosseini, Mahmood Md. Tahir, Hisham Alabduljabbar

Pages 911-916

[Purchase PDF](#) Article preview 

Research article Abstract only

Effects of physical activation on pore textures and heavy metals removal of fiber-based activated carbons

Muhammad Abbas Ahmad Zaini, Lee Lin Zhi, Tang Shu Hui, Yoshimasa Amano, Motoi Machida

Pages 917-921

[Purchase PDF](#) Article preview 

Research article Abstract only

Biomass as a potential source of sustainable fuel, chemical and tribological materials – Overview

Anthony Chukwunonso Opia, Mohd Kameil Bin Abdul Hamid, Samion Syahrullail, Abu Bakar Abd Rahim, Charles A.N. Johnson

Pages 922-928

FEEDBACK 

[Purchase PDF](#) Article preview 

Research article Abstract only

Green and sustainable concrete production using carpet fibers waste and palm oil fuel ash

Hisham Alabduljabbar, Hossein Mohammadhosseini, Mahmood Md. Tahir, Rayed Alyousef
Pages 929-934

[Purchase PDF](#) Article preview 

Research article Abstract only

Outcome of mix Ce and Er addition on solidification microstructure of the LM25 (Al-7Si-alloy)

Faraj Saeid Adrees Majeed, Nordin Bin Mohd Yusof, Mohd Azlan Suhaimi, Rosli Bin Ahmad, ... Mohd Sallehuddin Bin Yusof
Pages 935-940

[Purchase PDF](#) Article preview 

Research article Abstract only

Microstructural characterization of modified plasma spray LZ/YSZ thermal barrier coating by laser glazing

Azrina Arshad, Muhamad Azizi Mat Yajid, Mohd Hasbullah Idris
Pages 941-946

[Purchase PDF](#) Article preview 

Research article Abstract only

Influence of tartaric acid as the complexing agent on the properties of chemical bath deposited FeS_xO_y thin films

A.H. Hidzir, N.B. Haladin, M.Z.M. Yusop, N. Ibrahim, A. Supee
Pages 947-950

[Purchase PDF](#) Article preview 

Research article Abstract only

Influences of pristine carbon nanotube on the rheological properties of compatibilized polylactic acid/natural rubber nanocomposite

Nor Nisa Balqis Mohammad, Agus Arsad, Hyoung Jin Choi, Norzita Ngadi, Mohd Shaiful Zaidi Mat Desa
Pages 951-955

[Purchase PDF](#) Article preview 

Research article Abstract only

Comparative study on the enhancement of thermo-mechanical properties of carbon fiber and glass fiber reinforced epoxy composites

Zahid Iqbal Khan, Agus Arsad, Zurina Mohamad, Unsia Habib, Muhammad Abbas Ahmad Zaini
Pages 956-958

[Purchase PDF](#) Article preview 

Research article Abstract only

The effect of kenaf loading on the mechanical properties of kenaf-reinforced recycled poly(ethylene terephthalate)/recycled poly(propylene) (rPET/rPP) composite

Nur Hidayah Marzuki, Mat Uzir Wahit, Agus Arsad, Norhayani Othman, Noor Izyan Syazana Mohd Yusoff
Pages 959-964

[Purchase PDF](#) Article preview 

Research article Abstract only

The effect of fly ash and silica fume on self-compacting high-performance concrete

F.A. Mustapha, A. Sulaiman, R.N. Mohamed, S.A. Umara
Pages 965-969

[Purchase PDF](#) Article preview 

Research article Abstract only

Determination of optimum CO₂ water alternating gas (CO₂-WAG) ratio in Sumatera Light Oilfield

Muslim Abdurrahman, Fiki Hidayat, Ully Z. Husna, Agus Arsad
Pages 970-974

[Purchase PDF](#) Article preview 

FEEDBACK 

Research article Abstract only

Influence of fabrication methods on the microstructures and hardness of Ti-Ni, Ti-Nb and Ti-Ta for biomedical applications

E. Hamzah, Z.Z. Anuar, I.S. Arudi, M.K. Ibrahim, ... A. Khaatak

Pages 975-978

[Purchase PDF](#) [Article preview](#) 

Research article Abstract only

Efficient adsorptive removal of methylene blue from synthetic dye wastewater by green alginate modified with pandan

Abu Hassan Nordin, Khairudin Ahmad, Leow Kai Xin, Wong Syieluing, Norzita Ngadi

Pages 979-982

[Purchase PDF](#) [Article preview](#) 

Research article Abstract only

Performance evaluation of concrete with Arabic gum biopolymer

Abdeliazim Mustafa Mohamed, Mohd Azreen Mohd Ariffin, Hichem Smaoui, Mohd Hanim Osman

Pages 983-987

[Purchase PDF](#) [Article preview](#) 

Research article Abstract only

The fibre shear supplement of precast beam-half joints using steel fibre self-compacting concrete

N.F. Zamri, R.N. Mohamed, I.S. Ibrahim

Pages 988-992

[Purchase PDF](#) [Article preview](#) 

Research article Abstract only

Sodium hydrogen bicarbonate and water as blowing agent in palm kernel oil based polyol polyurethane foam

T. Fawzi, L.J. Yu, K.H. Badri, Zainuddin Sajuri, ... Se Yong Eh Noum

Pages 993-998

[Purchase PDF](#) [Article preview](#) 

FEEDBACK 

Research article Abstract only

Bending experiment on a novel configuration of composite system using rebar as shear connectors with partially encased cold-formed steel built-up beams

Musab N.A. Salih, Mahmood Md Tahir, S. Mohammad, Y. Ahmad, ... Khadavi

Pages 999-1005

[Purchase PDF](#) Article preview

Research article Abstract only

Thermal component for an electrochemical lithium-Ion battery model: Impact and variation on the battery performance

M.I. Ardani, M. Ab. Wahid, M.H. Ab. Talib, Z.H. Che Daud, ... M.A. M. Ariff

Pages 1006-1009

[Purchase PDF](#) Article preview

Research article Abstract only

Nanofiltration of binary palm oil/solvent mixtures: Experimental and modeling

Ki Min Lim, Nazlee Faisal Ghazali

Pages 1010-1014

[Purchase PDF](#) Article preview

Research article Abstract only

Dielectric and adsorptive properties of potassium hydroxide-treated castor residue carbons

Zulfitriah Surdi, Tang Shu Hui, Lee Lin Zhi, Muhammad Abbas Ahmad Zaini, Agus Arsad

Pages 1015-1019

[Purchase PDF](#) Article preview

Research article Abstract only

Optimizing water shut off (WSO) by utilizing cross-linker additive system in the nearby wellbore treatment in sandstone environment

D. Putra, M. Ardiansyah

Pages 1020-1024

[Purchase PDF](#) Article preview

FEEDBACK 

Research article Abstract only

Optimization of nickel nanoparticles concentration for biogas enhancement from green algae anaerobic digestion

Asad A. Zaidi, Sohaib Z. Khan, Yue Shi

Pages 1025-1028

[Purchase PDF](#) Article preview

Research article Abstract only

Laser surface cladding of mild steel with 316L stainless steel for anti-corrosion applications

Essam R.I. Mahmoud, Sohaib Z. Khan, Muhammad Ejaz

Pages 1029-1033

[Purchase PDF](#) Article preview

Research article Abstract only

Pullout behaviour of ribbed bars in self-compacting concrete with steel fibers

Nelly Majain, Ahmad Baharuddin Abdul Rahman, Azlan Adnan, Roslli Noor Mohamed

Pages 1034-1040

[Purchase PDF](#) Article preview

Research article Abstract only

A novel modified re-entrant honeycomb structure to enhance the auxetic behavior: Analytical and numerical study by FEA

Sohaib Z. Khan, Farrukh Mustahsan, Essam R.I. Mahmoud, S.H. Masood

Pages 1041-1045

[Purchase PDF](#) Article preview

Research article Abstract only

Development of light-transmitting concrete – A review

Shing Mei Chiew, Izni Syahrizal Ibrahim, Noor Nabilah Sarbini, Mohd Azree Mohd Ariffin, ... Jitendra Kumar Singh

Pages 1046-1050

[Purchase PDF](#) Article preview

FEEDBACK 

Research article Abstract only

Effect of praseodymium addition on wear properties of Al-15%Mg₂Si composites

Islahuddin Aziz, Hamidreza Ghandvar, Tuy Asma Abu Bakar, Chong Chin Yee

Pages 1051-1055

[Purchase PDF](#) Article preview

Research article Abstract only

Effect of heat treatment on modulus hardening and phase transformation in experimental 7xxx stir-cast alloy from recycled beverage cans

Abubakar Kazeem, Nur Azam Badarulzaman, Wan Fahmin Faiz Wan Ali

Pages 1056-1060

[Purchase PDF](#) Article preview

Research article Abstract only

Experimental of alternative demulsifier formulation from corn oil in overcoming water-oil emulsion

Tomi Erfando, Idham Khalid, Rizky Bahari

Pages 1061-1064

[Purchase PDF](#) Article preview

Research article Abstract only

Electrode materials application and performance for seawater power source

M.Z. Md. Zain, N.A.A. Napiyah, M.A. Shadan, T.O. Sadiq, ... N.A. Fadil

Pages 1065-1070

[Purchase PDF](#) Article preview

Research article Abstract only

Electroless deposited black nickel-phosphorous solar absorber coatings on carbon steel: Effect of plating bath pH

N.N.A. Azli, N.F. Mohd Amin, S.T. Oluhende, S.N.A. Mohamad, N.A. Fadil

Pages 1071-1076

[Purchase PDF](#) Article preview

FEEDBACK 

Research article Abstract only

Experimental studies on the impact characteristics of seamless fibre metal laminate (FML) tubes

M. A. Mansor, Z. Ahmad, M.R. Abdullah

Pages 1077-1081

[Purchase PDF](#) Article preview

Research article Abstract only

Statistical analysis of xylanase production from solid state fermentation of rice husk associated fungus *Aspergillus niger*

Siti Afiqah Razali, Nazaitulshila Rasit, Chee Kuan Ooi

Pages 1082-1087

[Purchase PDF](#) Article preview

Research article Abstract only

Study of hydrogen adsorption onto kenaf sorbent surface by metal impregnation method

S.N. Ezaty, N. Zaini, N.J. Farahhin, K.S.N. Kamarudin

Pages 1088-1093

[Purchase PDF](#) Article preview

Research article Abstract only

Experimental analysis of cassava starch as a fluid loss control agent on drilling mud

Novrianti, Idham khalid, Yuliastini, Adi Novriansyah

Pages 1094-1098

[Purchase PDF](#) Article preview

Research article Abstract only

Drilling mud performances consist of CMC made by carton waste and Na_2CO_3 for reducing lost circulation

Novia Rita, Idham Khalid, Muhammad Ridho Efras

Pages 1099-1102

[Purchase PDF](#) Article preview

FEEDBACK 

[< Previous vol/issue](#)

[Next vol/issue >](#)

ISSN: 2214-7853

Copyright © 2022 Elsevier Ltd. All rights reserved



Copyright © 2022 Elsevier B.V. or its licensors or contributors.
ScienceDirect® is a registered trademark of Elsevier B.V.





**Sustainable & Integrated Engineering
International Conference**
8 - 9 December 2019 • Putrajaya
<http://engineering.utm.my/sie2019/>



Organizing Committee

Organizing committee



Advisors

Prof. Dato' Ir. Dr. Mohammed Rafiq bin Dato' Abdul Kadir
Prof. Dr. Naomie Salim

General Chairs

Assoc. Prof. Ir. Dr. Zaini Ahmad
Prof. Dr. Syed Abd. Rahman Syed Abu Bakar

Technical Program Chairs

Assoc. Prof. Dr. Mohd. Kamaruddin Abd Hamid
Assoc. Prof. Dr. Norhayati Ahmad
Assoc. Prof. Dr. Agus Arsad
Assoc. Prof. Dr. Arizu Sulaiman
Dr. Ting Chee Ming
Dr. Maheyzah Sirat
Dr. Musa Mohd Mokji

Finance Chairs

Assoc. Prof. Dr. Tuty Asma Abu Bakar
Dr. Zarina Ab Muis

Publication Chair

Assoc. Prof. Ir. Dr. Malarvili Bala Krishnan

Website & Publicity Chair

Dr. Usman Ullah Sheikh

Sponsorship Chair

Dr. Nor Hasrul Akhmal Ngadiman

Event Manager

Dr. Azizul Azri Mustaffa

Dr. Mohd Asmadi Mohammed Yussuf

Logistic & Technical

Dr. Aizuddin Supee

Protocol / Local Arrangement Chair

Dr. Zalilah Sharer

Secretariat

Dr. Noraliani Alias

International & Local Technical Committee Members

**Chemical Engineering**

- Assoc. Prof. Dr. Agus Arsad (UTM)
- Dr. Muslim Abdurrahman (Universitas Islam Riau, Indonesia)
- Ir. Dr. Muhammad Abbas Ahmad Zaini (UTM)
- Dr. Faisal Amri Tanjung (Universitas Medan Area, Indonesia)
- Dr. Muzaffar Zulkifli (Universiti Kuala Lumpur)

Civil Engineering

- Assoc. Prof. Dr. Arizu Sulaiman (UTM, Malaysia)
- Prof. Ir. Dr. Mahmood Md Tahir (UTM, Malaysia)
- Prof. Dr. Sobri Harun (UTM, Malaysia)

- Ir. Dr. Anuar Kasa (UKM, Malaysia)
- Prof. Dr. Jahangir Mirza (Research Institute of Hydro-Quebec, Canada)
- Prof. Ir. Dr. Anis Saggaf (Universitas Sri Wijaya, Indonesia)

Education Engineering

- Prof. Dr. Khairiyah Mohd. Yusof (Malaysia)
- Prof. Dr. Sunil Maharaj (South Africa)
- Prof. Dr. William Oakes (USA)
- Assoc. Prof. Dr. Mohd Kamaruddin Abdul Hamid (UTM)
- Assoc. Prof. Ir. Dr. Syamsul Rizal Abd. Shukor (USM)
- Dr. Syed Ahmad Helmi Syed Hassan

Electrical Engineering

- Assoc. Prof. Dr. Munaf Rashid (PAKISTAN)
- Assoc. Prof. Dr. Awang bin Jusoh (UTM)
- Assoc. Prof. Dr. Mohd Hanif Ibrahim (UTM)
- Dr. Syed Omid Shahdi (International)
- Dr. Norhashimah Mohd Saad (UTEM)

Mechanical Engineering

- Prof. Ir. Dr. Zuhailawati Hussain
- Prof. Dr. Yunan Prawoto (South Ural State University, Russia)
- Assoc. Prof. Dr. Norhayati Ahmad (UTM)
- Assoc. Prof. Dr. Sohaib Zia Khan (Islamic Univ of Madinah)
- Ts. Dr. Mas Ayu Hassan
- Dr. Norizah Hj Redzuan (UTM)
- Dr. Roozbeh Alipour (Islamic Azad University, Mahshahr, Iran)
- Dr. Sohaib Zia Khan (Islamic Univ of Madinah)

Biomedical and Health Engineering

- Dr. Muhammad Hanif Ramlee (UTM)
- Dr. Jaysuman Bin Pusppanathan (UTM)
- Dr. Siti Balqis Samdin (KAUST, Saudi Arabia)

Computer Engineering

- Assoc. Prof Dr. Adnan Nadeem (Madinah)
- Dr. Siti Hajar Othman (UTM)

- Dr. Maheyzah Md Siraj (UTM)
- Dr. Haslina Hashim (UTM)
- Dr. Taqwa Ahmed (Alyamamah University, Saudi)
- Dr. Hassan Chizari (University of Gloucestershire, UK)

Need more information?

Get in touch with us.



UTM
UNIVERSITI TEKNOLOGI MALAYSIA

[CONTACT US ▶](#)



Faculty of Engineering | Universiti Teknologi Malaysia



Contents lists available at ScienceDirect

Materials Today: Proceedings

journal homepage: www.elsevier.com/locate/matpr

Experimental of alternative demulsifier formulation from corn oil in overcoming water–oil emulsion

Tomi Erfando*, Idham Khalid, Rizky Bahari

Department of Petroleum Engineering, Universitas Islam Riau, Kaharuddin Nasution 113, Pekanbaru 28284, Indonesia

ARTICLE INFO

Article history:

Received 5 May 2020

Received in revised form 27 May 2020

Accepted 29 May 2020

Available online xxxxx

Keywords:

Demulsifier

Corn oil

Emulsion

Separation

Bottle test

ABSTRACT

An emulsion is one of the problems that often occur in oil production activities. Emulsions happen when water is produced with oil. The presence of emulsions in crude oil makes it difficult for crude oil to be processed and the quality of the oil does not become good because it causes water to be contained in crude oil. An effort to overcome is to use a demulsifier. This study aims to test the demulsifier from corn oil. It will be processed with the saponification process to become a demulsifier. KOH and glycerin are used as additives in the saponification process. The substances found in corn oil are palmitic acid, linoleic acid, stearic acid, linolenic acid, and oleic acid. In the demulsification process used three various demulsifiers. There are commercial demulsifier (DK), green demulsifier 1 (DG1), green demulsifier 2 (DG2). Green demulsifier 1 and green demulsifier 2 are demulsifiers mixture by corn oil process, whereas the commercial demulsifier is chemical used to in the field. Demulsifier derived from corn oil are expected to have the ability to separate water from oil better than commercial demulsifiers. Demulsifier testing is done using the bottle test method. The test was carried out for 180 min and carried out observations every 30 min. The bottle test method was carried out using a water bath. Demulsifiers made from natural ingredients have better abilities than commercial demulsifiers. The best test results by the green demulsifier at 80 °C with a concentration of 5 ml separated 39 ml of water. While the commercial demulsifier with a concentration of 5 ml separates 32 ml of water. So demulsifier made from corn oil is more effective in separating water than commercial demulsifiers.

© 2020 Elsevier Ltd. All rights reserved.

Selection and peer-review under responsibility of the scientific committee of the SIE 2019: Sustainable & Integrated Engineering International Conference.

1. Introduction

Oil produced from the wellhead will flow to the gathering station where in this process, several problems can occur. One of them is an emulsion in crude oil. Emulsions that occur cause oil to be difficult to process. A way to overcome the emulsion problem is to use commercial demulsifiers that are widely available in the market. Unfortunately, commercial demulsifiers still have weaknesses that have the potential to pollute the environment because of the chemicals they contain [1]. Then research will be conducted to determine the potential of natural ingredients as an alternative demulsifier. The natural material to be used is corn oil. Demulsifiers derived from natural ingredients are also known as the green demulsifier. Factors affecting the composition of emulsion in crude oil are the water–oil ratio, the presence of natural emulsifiers and

secondary emulsion [2]. Efforts were made to overcome the emulsion in Nigeria by using local materials as a demulsifier formulation to break down the emulsion [3]. The study aimed to compare the formulation of demulsifiers with local materials and existing demulsifiers. Therefore, researchers also want to develop local materials available in Indonesia as demulsifier ingredients.

Environmental friendly demulsifier formulations will be developed to optimize oil production. This formulation must contain fewer poisons and have the same efficiency as demulsifiers made using chemical compositions [1]. Based on data obtained from data centers and agricultural information systems, the amount of corn production in 2016 was 23.19 tons [4]. This corn production is predicted to continue to increase to 29.05 tons in 2020. Therefore, the aim of this research made organic demulsifiers or green demulsifiers from corn oil. It is expected that this demulsifier can be used effectively and has better quality than commercial demulsifiers made from chemicals. The process of this research will be conducted at the Petroleum Engineering Laboratory of the Islamic

* Corresponding author.

E-mail address: tomierfando@eng.uir.ac.id (T. Erfando).

<https://doi.org/10.1016/j.matpr.2020.05.778>

2214-7853/© 2020 Elsevier Ltd. All rights reserved.

Selection and peer-review under responsibility of the scientific committee of the SIE 2019: Sustainable & Integrated Engineering International Conference.

Nomenclature

°C	degree of celcius	kg	kilogram
DK	commercial demulsifier	ml	milliliter
DG	green demulsifier		
g	gram		

University of Riau. This green demulsifier will be tested for its ability to separate oil and water using the bottle test method and to use crude oil samples from the wellhead. The parameters to be tested are the temperature and concentration of the emulsifier. The temperature tested will vary by conditioning the conditions in the field. Demulsifiers made from corn oil are expected to be able to overcome emulsions in crude oil better than commercial demulsifiers.

2. Materials and methods

Equipment and materials used in the manufacture of green demulsifier formulations are aquadest, KOH 90%, glycerin, lemon, orange juicer, knives, filters, beakers, heaters, magnetic stirrers. While the equipment used to carry out the bottle test is a water bath, digital balance, volumetric flask, 100 ml bottle, test tube, funnel, measuring cup. The raw materials used have met the requirements for making soap following SNI 06-4985-1996. The method used in manufacturing green demulsifier is saponification [5]. The detailed steps for making the demulsifier formulation are as follows: First of all, the experimental equipment and materials were prepared. Seventy-five milliliters of corn oil is heated at 70 °C for 30 min, then KOH that has been dissolved with aquadest is poured slowly into the oil being heated while continuing to stir as much as 29 ml. In the final step, ten milliliters of glycerin and few aquadest are added to form a demulsifier [6]. As for the characteristics of crude oil used in this experiment can be seen in Table 1.

The characteristics of the oil used in testing the bottle test are crude oil samples obtained from the wellhead. The type of oil used is heavy oil. This oil comes from one of the oil and gas fields located in Riau Province. Bottle test is one method that is very often used in testing demulsifiers in the laboratory. This experiment carried out using the bottle test method as well [7]. The research carried out by them aims to overcome the emulsion problem in oil and gas fields in southern Sumatra. Table 2 shows the characteristics of corn oil used in the experiment.

The citric acid content of the lemon used is 48.6 g/Kg [8]. Citric acid is beneficial for producing water and oil limit. Fatty acid from oil makes the green demulsifiers have clear color and viscosity level like commercial demulsifiers.

3. Results and discussion

Demulsifier made from corn oil is also called green demulsifier. Corn oil contains various substances that can separate water and

Table 2
The characteristics of corn oil used in this research.

Type	Saturated fat (%)	Not saturated fat (%)
Corn oil	Palmitic(13) Stearic(3)	Linoleic(52) Oleic(31) Linolenic(1)

oil. Corn oil contains palmitic acid, linoleic acid, stearic acid, linolenic acid, and oleic acid [9]. Every ingredient contained in corn oil has an impact on the demulsifier. Green demulsifier and commercial demulsifier have the highest water separation results at 80 °C.

Testing is done by adding each of the demulsifier formulas with different concentrations of 1 ml, 3 ml, and 5 ml. There are three demulsifier formulas tested on oil, namely DK, DG1, and DG2. DK is a commercial demulsifier commonly used in the field. While the formula DG1 and DG2 are demulsifiers made from corn oil. The difference between DG1 and DG2 is only a demulsifier made from corn oil with a saponification process, while DG2 is a formula DG1 added with lemon liquid. The highest water separation by DG2 at 80 °C with a total volume of water as much as 39 ml. Demulsifier concentration affects the results of separation in this experiment.

From Fig. 1, it can be seen that the demulsification process with a bottle test at 80 °C shows that demulsifiers with corn oil formulations have a higher degree of separation than commercial demulsifiers. The highest water separation occurs with a concentration of 5 ml. That is because of the increased concentration of the demulsifier reduces the interfacial tension [10]. Based on the opinion of [10], the higher the concentration of demulsifiers, the interfacial tension will decrease. If one of the liquid interfacial tension decreases, it will facilitate the fluid phase to separate. From the test parameters that have been done, the temperature has the biggest role in the emulsification process when compared with concentration and time of separation. Based on data obtained from software statistics, the separation that occurs due to temperature testing has the biggest role. The impact on the demulsification process is 37.5% and 62.5% is influenced by other factors. This demulsification process is a process that occurs in the breakdown of the emulsion into an integral fluid phase. The concentration of demulsifiers only affects 1% of the demulsification process, and 99% is influenced by factors other than concentration. This means that in the tests that have been carried out, the concentration of the demulsifier formula does not significantly affect the demulsification process. While the duration of testing only affects only 0.5% of the demulsification process. The three parameters tested only the temperature has a dominant influence on the demulsification process. Higher the concentration, better the separation test and longer the demulsification process occurs in the separation water bath that will be perfect. Based on one researched by [11], optimum concentration obtained 5 ml. The equal concentrations used in the test are 1 ml, 3 ml, and 5 ml. These show at condition test 60 °C, 70 °C, and 80 °C.

Table 1
The characteristics of crude oil tested in this research.

Parameter	Value
Density (ρ_{oil})	0.929 gr/ml
Specific gravity (SG)	0.929
°API	20.8

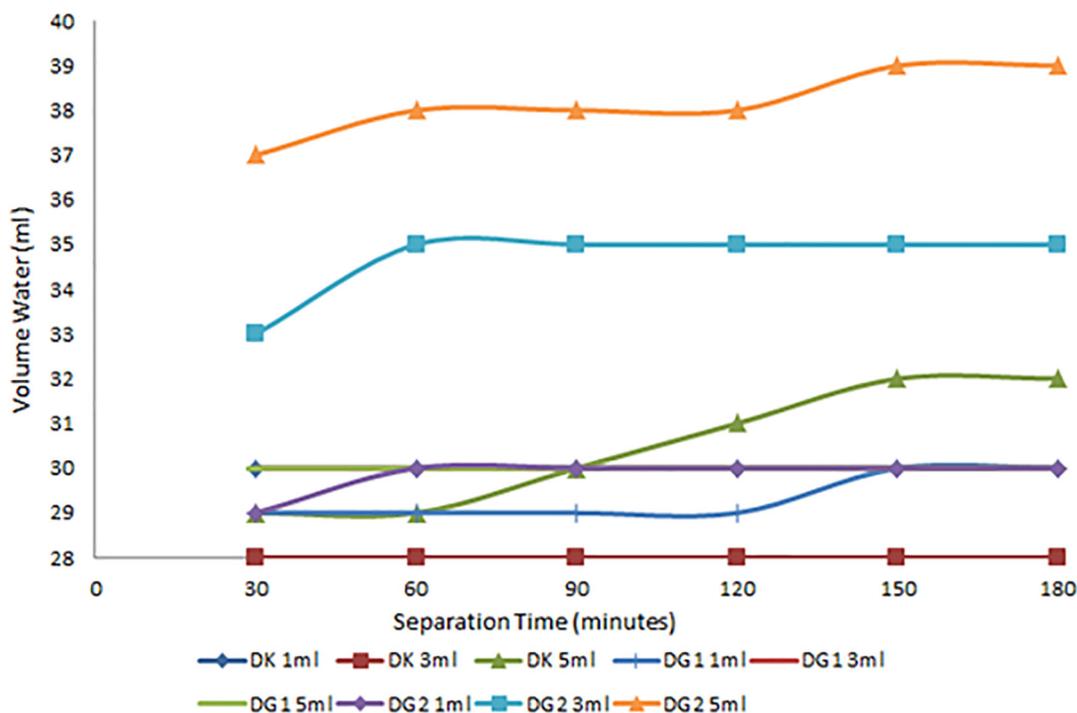


Fig. 1. The best result separations were at temperature of 80 °C.

The comparison of the separation between the commercial demulsifier formulation and the green demulsifier shows a significant value. All the parameters, the test temperature, concentration and time of separation, are dominated by the green demulsifier. These are seen from the 30th minute to the 180th minute. High concentrations of demulsifiers greatly affect the tension between fluid surfaces [12]. In the study of [12] also said that increasing concentration of demulsifiers resulted in a decrease in interfacial tension, viscosity, and increased water separation. So the surface elasticity of the liquid greatly determines the level of efficiency of the demulsifier. The best test results from each test condition can be seen in Table 3.

Based on the results of the testing of all conditions, it can be seen that the green demulsifier can separate water better than commercial demulsifiers. Demulsifiers made with corn oil better than the commercial demulsifier. Corn oil produced surfactant, as stated by previous research [13]. The surfactant changed the interfacial tension between oil and water. At a temperature of 40 °C, the separation was carried out by DG1 with a concentration of 5 ml. While the commercial demulsifier formula with a concentration of 5 ml does not occur separation. Tests carried out at a temperature of 50 °C also show that demulsifiers made from natural materials are better compared to commercial demulsifiers. It can be seen from the results of the separation that occurred because during the testing carried out 180 min; the commercial demulsifier

was not able to separate water more than the green demulsifier. The best results of separation at the testing temperature of 60 °C have a lower yield compared to the temperature of 50 °C, which is 32 ml. These results obtained from the DG2 formula show that the demulsifier DG2 formula is better when compared to the commercial demulsifier green demulsifier formula made from corn oil. Separation at a temperature of 70 °C showed that the formula DG2 with concentration had the highest water separation of 32 ml. Water separated at temperatures of 60 °C and 70 °C lower than DG1 at a temperature of 50 °C. The peak of water volume separation was 39 ml at a temperature of 80 °C. This is the best result of all test conditions. This demulsifier formula made from natural ingredients has better separation ability when low temperatures and high temperatures. So the comparison between commercial demulsifier and green demulsifier has been proven from this research. All the testing conditions, the results of the separation obtained by the green demulsifier, were better than the commercial demulsifier. In [14], kaffir lime separates water more than commercial demulsifiers. These results increasingly indicate that the potential of natural materials can be used as a demulsifier used in the oil and gas industry to deal with emulsion problems. Demulsifiers also can apply at the refinery unit, it will produce better crude oil to process become a product. Product of processing crude oil are kerosene, gasoline, and other product from crude oil. Temperature is the factor that most influences separation because higher temperature better the separation results. High temperatures cause the emulsion to break down between oil and water [15].

4. Conclusion

This research showed that corn oil produced green demulsifiers which have better performance than commercial demulsifier. The addition of lemon also increased the performance of the demulsifier. The most influencing factor for emulsion separation

Table 3

The peak of separation based on concentrations and temperatures.

Results of separation (ml)	Formulation	Concentration (ml)	Temperature (°C)
26	DG1	5	40
33	DG1	5	50
30	DG2	5	60
32	DG2	5	70
39	DG2	5	80

was temperature conditions. In DG1 and DG2, the best result of the separation of water was at a concentration of 5 ml, and the best temperature of separation was 80 °C.

CRedit authorship contribution statement

Tom Erfando: Conceptualization, Methodology, Investigation, Writing - review & editing. **Idham Khalid:** Data curation, Writing - original draft. **Rizky Bahari:** Data curation, Writing - original draft.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

This research was supported by the Ministry of Research, Technology, and Higher Education Indonesia with contract no. 296/KONTRAK/LPPM/4-2019 Authors also wish to thank Universitas Islam Riau and URP PT. Chevron Pacific Indonesia, for the encouragement of writing this paper.

References

- [1] Dalmazzone, C. Noik, Development of new "green" Demulsifiers for oil production, Conf. Pap. SPE 65041 (2001) 1–9, <https://doi.org/10.2523/65041-MS>.
- [2] P.C. Oil, Chapter 22 Demulsifiers, in: Oil F. Chem., 2015: pp. 325–344.
- [3] A.D.I. Sulaiman, S. Abdulsalam, E. Technology, A. Tafawa, A.O. Francis, A polytechnic, formulation of demulsifiers from locally sourced raw materials for treatment of a typical nigerian crude oil emulsion, J. SPE-178377-MS. (2015) 1–17.
- [4] M. Chafid, Outlook Komoditas Pertanian Tanaman Pangan, Pusat Data dan Sistem Informasi Pertanian Kementerian, Pertanian (2016) 2016.
- [5] C.S. Lilis Sukeksi, Andy Junianto Sidabutar, Pembuatan Sabun Dengan Menggunakan Kulit Buah Kapuk Sebagai Sumber Alkali, J. Tek. Kim. USU. 6 (2017) 8–13.
- [6] S.S. Putro W.P. Utami Laporan Tugas Akhir Pembuatan Sabun Cair Dari Minyak Goreng Bekas (Jelantah) 2011 Surakarta.
- [7] M.R. Manggala, S. Kasmungin, K. Fajarwati, Studi Pengembangan Demulsifier Pada Skala Laboratorium Untuk Mengatasi Masalah Emulsi Minyak Di Lapangan " Z ", Sumatera Selatan, Semin. Nas. Cendekiawan Ke 3 (2017) 145–151.
- [8] D.G. Assimos, Quantitative assessment of citric acid in lemon juice, lime juice, and commercially-available fruit juice products, J. Endourol. 22 (2008) 567–570, <https://doi.org/10.1089/end.2007.0304>.
- [9] F. Gustone, Typical Fatty–Acid Compositions of Some Common Fats (adapted from Gunstone, F., in: 1996: pp. 2–3.
- [10] O. Alomair S. Alqabandi M. Malallah A. Alajmi Experimental Investigation of Crude Oil Emulsion Physicochemical Properties and Demulsifier Dosage Prediction, J. SPE-176465-MS. 2015 1 24.
- [11] T. Erfando, S.R. Cahyani, N. Rita, The utilization of citrus hystrix and citrus limon as an organic demulsifier formulation The utilization of citrus hystrix and citrus limon as an organic demulsifier formulation, in: IOP Conf. Ser. Mater. Sci. Eng., 2019: pp. 1–9. <https://doi.org/10.1088/1757-899X/509/1/012145>.
- [12] W. Kang, G. Jing, H. Zhang, M. Li, Z. Wu, Influence of demulsifier on interfacial film between oil and water &, Colloids and Surfaces. 272 (2006) 27–31, <https://doi.org/10.1016/j.colsurfa.2005.07.004>.
- [13] D.A. Sabatini, Surfactant-based oil extraction of corn germ, J. Oil Chem. 99 (2010) 863–869, <https://doi.org/10.1007/s11746-010-1719-2>.
- [14] T. Erfando, N. Rita, S.R. Cahyani, Identifikasi Potensi Jeruk Purut Sebagai Demulsifier Untuk Memisahkan Air Dari Emulsi Minyak Di Lapangan Minyak Riau, J. Kim. Mulawarman. 15 (2018) 117–121.
- [15] T. Erfando, Effects of adding local materials on demulsifier performance for oil-water emulsions, Int. J. Geomate 17 (2019), <https://doi.org/10.21660/2019.62.ICEE9>.



CERTIFICATE — OF APPRECIATION —

This certificate is proudly presented to

Tommi Erfando

In grateful appreciation of the invaluable assistance as the

PRESENTER

In the

Sustainable & Integrated Engineering International Conference 2019

The Everly Hotel, Putrajaya, Malaysia
.8th -9th December 2019



Assoc. Prof. Ir. Dr. Zaini Ahmad
GENERAL CHAIR

Sustainable & Integrated Engineering International Conference
Universiti Teknologi Malaysia

Prof. Dr. Syed Abd Rahman Syed Abu Bakar
GENERAL CHAIR

Sustainable & Integrated Engineering International Conference
Universiti Teknologi Malaysia



UTM
UNIVERSITI TEKNOLOGI MALAYSIA