ISBN: 978-979-3793-73-3

UIR INTERNATIONAL CONFERENCE 2017 COSF

IN ERNATIONAL CONFERENCE ON SCIENCE, ENGINEERING AND TECHNOLOGY

"Sustainable Development in Developing Country"

PEKANBARU, 8-10 NOVEMBER 2017



LEMBAGA PENELITIAN DAN PENGABDIAN KEPADA MASYARAKAT UNIVERSITAS ISLAM RIAU JL. Kaharuddin Nasurbon No. 11.3. Marpoyan, Pekanbaru Riau - Indonesia 28284

UNIVERSITAS ISLAM RIAU

YAYASAN LEMBAGA PENDIDIKAN ISLAM (YLPI) RIAU

2017

C

ICOSET

INTERNATIONAL CONFERENCE ON SCIENCE, ENGINEERING and TECHNOLOGY

PROCEEDING

International Conference on Science Engineering and Technology (ICoSET) 08 - 10 November 2017 Pekanbaru, Indonesia

"Sustainable Development in Developing Country

Editor :

Evizal Abdul Kadir

Ku Ruhana Ku Mahamud

Tole Sutikno

Organizer :



Co-Organizers :



PUBLISHER BY UNIVERSITAS ISLAM RIAU (UIR) PRESS 2017

UIR Press

Art Design, Publishing & Printing

LPPM, Rectorat Building 3rd Floor, Jl. Kaharuddin Nasution No.113, Marpoyan 28284 Pekanbaru, Indonesia.

Telp: 0761-674674, Fax: 0761-674834

uirpress.uir.ac.id

@UIR Press 2017

Hak cipta dilindungi oleh undang-undang; dilarang memperbanyak, menyalin, merekan, sebagian atau seluruh bagian buku ini dalam bahasa atau bentuk apapun tanpa izin tertulis dari penerbit.

ISBN : 978-979-3793-73-3

Perpustakaan Nasional: Katalog Dalam Terbitan (KDT)

International Conference on Science Engineering and Technology (ICoSET) 08 - 10 November 2017, Pekanbaru, Indonesia. Evizal Abdul Kadir, et al – Pekanbaru : UIR Press 2017

Xii, 261 p. ; ilus.; 29 cm

Bibliografi

ISBN: 978-979-3793-73-3

ORGANIZING COMMITTEE

Conference Chair: Dr. Evizal Abdul Kadir, ST., M.Eng

Conference Co-Chair Science: Dr. Dedikarni, ST., M.Sc

Technical Program Chair: Prof. Dr. Ku Ruhana Ku Mahamud Assoc. Prof. Dr. Tole Sutikno

Technical Program Committees:

Prof. Dr. Detri Karya, SE., MA (Islamic University of Riau, Indonesia)

Prof. Dr. Tengku Dahril, M.Sc (Islamic University of Riau, Indonesia)

Prof. Dr. Sugeng Wiyono, MMT (Islamic University of Riau, Indonesia)

Prof. Zainal A. Hasibuan, MLS., Ph.D (University of Indonesia, Indonesia)

Prof. Dr. Usama Fauzi Juniansyah (University of Tokyo, Japan)

Prof. Dr. Zailuddin Arifin (Universiti Teknologi MARA, Malaysia)

Prof. Ahmed A. Al Absi (Kyungdong University Korea)

Prof. Kazuhiko Nagatomo (Dayeh University)

Assoc. Prof. Dr. Shahrul Kamal Abdul Rahim (Universiti Teknologi Malaysia)

Ahn, Young Mee, Ph.D (Inha University, Korea)

Hitoshi Irie, Ph.D (Chiba University, Japan)

Julie Yu-Chih Liu, Ph.D (Yuan Ze University, Taiwan) **Conference Co-Chair Social:** Dr. Sri Yuliani, M.Pd

Prof. Dr. Hasan Basri Jumin, M.Sc (Islamic University of Riau, Indonesia)

Prof. Dr. Syafrinaldi, SH., M.CL (Islamic University of Riau, Indonesia)

Prof. Dr. Seno Himala Putra, M.Pd (Islamic University of Riau, Indonesia)

Prof. Josaphat Tetuko Sri Sumantyo, Ph.D (Chiba University, Japan)

Prof. Dr. Eko Supriyanto (Universiti Teknologi Malaysia)

Prof. Jhon Lee, B.Sc, M.Sc., Ph.D (Kyungdong University Korea)

Prof. Wisup Bae, Ph.D (Sejong University, Korea)

Assoc. Prof. Dr. Azhan Hashim Ismail (Universiti Teknologi MARA, Malaysia)

Dr. Inkyo Cheong (Inha University, Korea)

Dr. Montira Leelakriangsak (Prince of Songkla University, Thailand)

Kuen-Song Lin, Ph.D (Yuan Ze University, Taiwan)

Liang Chih Yu, Ph. D (Yuan Ze University, Taiwan)

ICoSEEH UIR 08-10 November 2017, Pekanbaru, Riau, Indonesia ISBN: 978-979-3793-73-3

Chia-Yu Hsu, Ph.D (Yuan Ze University, Taiwan)

Dr. Wahyudi Sutopo (Solo State University, Indonesia)

Dr. Anas Puri, ST., MT (Islamic University of Riau)

Dr. Eng. Husnul Kausarian, B.Sc (Hons)., M.Sc (Islamic University of Riau)

Organizing Committee:

Faizan Dalilla, ST., M.Si Augusta Adha, ST., MT

Treasurer: Bismi Annisa, ST., MT

Dr. Tulyapong Tulyapitak (Prince of Songkla University, Thailand)

Dr. Zulfatman (University of Muhammadyah Malang, Indonesia)

Dr. Eng. Muslim, ST., MT (Islamic University of Riau)

Dr. Shukor Sanim Mohd Fauzi (Universiti Teknologi MARA, Malaysia)

Secretary:

Dr. Zetriuslita, S.Pd., M.Si Heriyanto, SP., M.Si Reni Anggraini Putri, SE

Information Technology (IT): Abdul Syukur, S.Kom., M.Kom Hendra Gunawan, ST., M.Eng

TABLE OF CONTENTS

	CoSEEH Universitas Islam Riau				
Foreword from Rector Universitas Islam Riau					
1001 :Feasibility Study On Solar Power Of Riau Pekanbaru Capacity 1 Mw (Evizal Abdul Kadir, Ahmed A. Al Abs	Generation In Islamic University i, Sri Listia Rosa)				
1002 :Similarity Cluster of Indonesian E (Arbi Haza Nasution, Yohei Murakami,	thnic Languages Toru Ishida)				
1003 :Efficiency Of Rubber People Prod Riau Province (Heriyanto)	luction In Kampar Regency Of				
1004 : Determining Sliders Position by U 3-DOF Linear Delta Robot (Nur Khamo	Using Pythagoras Principle of li, Muhammad Imam Muthahhar)				
1005 :Morphological Characterization of (Jack) Ridl.) As Riau Province Mascot I	f Nibung (Oncosperma Tigillarium Flora (Desti)				
1006 : Weight On Bit Analysis In Rate C Bourgoyne And Young Method (Novrianti, Ali Musnal, Hardi, Bop Dua	Of Penetration Optimization Using				
1007 : Design Self Service Software Pro Unified Modeling Language (Jaroji, Ag	totype For Village Office Using ustiawan, Rezki Kurniati)				
1008 :The Effects of Tengku Agung Sult Physical Development in Siak Sub Distr (Idham Nugraha, Febby Asteriani, Puji Agus)	ricts				
•	n Influence And Type Of Video Content im Syahbana, Memen Akbar)				
1010 : An Overview of Fingerprint Temp (Apri Siswanto, Ku Ruhana Ku-Maham	plate Protection Approaches ud, and Evizal Abdul Kadir)				
1011 :Production Optimization Esp-To- Well Simulator (Ariyon, M, Nugroho, R	Gas Lift In High Gor Case Using R. S)				

FEASIBILITY STUDY ON SOLAR POWER GENERATION IN ISLAMIC UNIVERSITY OF RIAU PEKANBARU CAPACITY 1 MW

Evizal Abdul Kadir¹, Ahmed A. Al Absi², Sri Listia Rosa³

^{1,3}Department of Information Technology, Faculty of Engineering, Universitas Islam Riau Jl. KaharuddinNasution No.113, Marpoyan, Pekanbaru 28284 Riau, Indonesia ²Department of Information Technology, Kyungdong University Global Campus, Gosung, Gangwondo, 24764, South Korea Email: <u>evizal@eng.uir.ac.id,absiahmed@kduniv.ac.kr, srilistiarosa@eng.uir.ac.id</u>

Abstract

Currently electricity power supplies have limited resources because of most power generation from diesel engine and others limited resources. Solar power is one of alternative energy resources that having in tropical region especially in Indonesia. This research conduct on feasibility and capacity that potential be generate in Islamic University of Riau. Method use is based on survey and data collected in area of campus Islamic University of Riau. Results shows within as space on open area that available as 2 Hectare in Islamic University of Riau, potential to generate electricity power by installing solar photovoltaic as much as 1 MW. This capacity have potential to replace electricity usage in campus daily in day time and night time will be less because not much activity compare to daytime. With this solar photovoltaic power generation will be reduce University expenses in monthly electric bill as well in night time power is surplus then can be sell to resident that get extra income for University.

Keywords: Solar Power, Feasibility Study, UIR

1. INTRODUCTION

This diesel based energy has several problems that need to be taken into consideration. Firstly, the CO2 emissions due to fuel for generators were 569.000 tons in 2012. Secondly, oil spills and pollution (both chemical and acoustic) are especially important in the arctic region. The pristine characteristics of this environment, like the low temperatures that regulate the climate or the inability of the habitat of cleaning itself, make the problems mentioned above even worst. Thirdly, the transportation of fuel to remote areas can be dangerous and highly during especially winter. cost, An

interesting approach to solve this problem could be the introduction of stand-alone

PV systems. This kind of systems has the possibility of reducing fuel consumption and noise level of the area. The election of Photovoltaic (PV) energy as the substitute of the fuel generators comes from an analysis of the characteristics that make the arctic environment a unique place. The relatively high irradiances, long day lights and the low ambient temperature are key factors that increase the efficiency of the solar energy production. In addition, PV systems require almost no maintenance, which make it an important aspect in a country where no technicians, tools and equipment are easily available.

ICoSET UIR 8-10 November 2017, Pekanbaru, Riau, Indonesia ISBN: 978-979-3793-73-3

When it comes to our energy needs, there are three main problems. We have confused needs and desires, cheap energy and not educated ourselves enough on understanding energy. Need is a word that gets used out of context all the time, it falls into the category of words like have to, should, got to and must. When we hear those words, we feel as if our choice is taken away and we are presented with something we have to do or else. The reason is what is it we need in our homes that require energy, people say all the time to me, but I need a dryer, air-con and else. When in reality they are just desires. Things we would like to have to make our days easier so we can get more done in a day. So that we can go to work to pay for our electricity bills in reality, more people on earth live without electricity than with, so we don't need it at all to survive. Have a think about how much excess electrical load you have in your home just because it saves you time or helps you do something faster.

The next part of the problem is cheap energy, what has made us go out and buy a lot of electrical devices that save us time. That way we can go to work and make more money as it's cheaper to have the electricity work for us at home while we go work. This has helped a lot of desires become needs. Cheap energy has helped bad building designs to get built because we don't need to insulate or think about solar aspect anymore. We just put the air-con on, and that will heat and cool the house at the touch of a button, cheap fossil fuels have had an enormous part in making renewable energy seem expensive. Fossil fuels receive a huge chunk of currency from governments to keep the energy coming so that we don't get upset when there is no energy at the power points. If they charged us the true cost of what it takes to get energy to our power points. I guarantee that would instantly help reduce the need for energy in our homes. The math is simple, multiply your energy bill by 10 times, and that's how much of a discount the government is paying for you every month right now to subsidies fossil fuels and that is worldwide.[1]

2. LITERATURE REVIEW

Solar PV technology converts energy from solar radiation directly into electricity. PV cells Solar are the electricity-generating component of a solar energy system. When sunlight (photons) strikes a PV cell, an electric current is produced by stimulating electrons (negative charges) in a layer in the cell designed to give up electrons easily. The existing electric field in the solar cell pulls these electrons to another layer. By connecting the cell to an external load, this current (movement of charges) can then be used to power the load (e.g., a light bulb) as shows in figure 1.

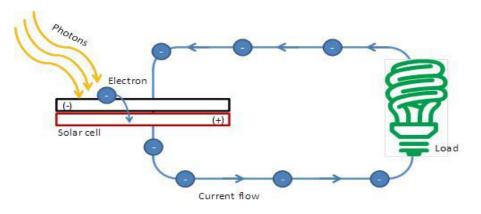


Figure 1. Generation of electricity from a PV cell

PV cells are assembled into a PV panel or modules, PV modules are then connected to create an array. The modules are connected in series and then

electricity generated by the array is then converted by an inverter to useable alternating current (AC) that can be consumed by adjoining buildings and facilities or exported to the electricity grid. PV system size varies from small residential (2–10 kW), to commercial (100–500 kW), to large utility scale (10+ MW). Central distribution plants are also currently being built in the 100+ MW scale. Electricity from utility-scale systems is commonly sold back to the electricity grid. in parallel as needed to reach the specific voltage and current requirements for the array. The direct current (DC

A typical PV system is made up of several key components, including:

- PV modules
- Inverter

• Balance-of-system (BOS) components.

These, along with other PV system components, are discussed in turn below in figure 2.

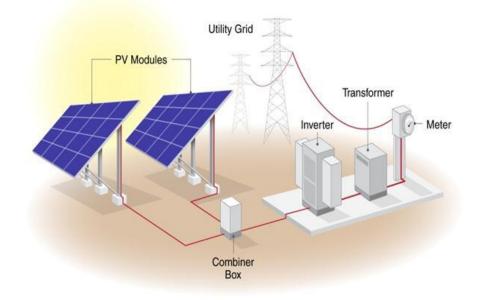


Figure 2. Ground-mounted array diagram

Module technologies are differentiated by the type of PV material used, resulting in a range of conversion efficiencies from light energy to electrical energy. The module efficiency is a measure of the percentage of solar energy converted into electricity.

Two common PV technologies that have been widely used for commercial- and utility-scale projects are crystalline silicon and thin film. Traditional solar cells are made from silicon. Silicon is quite abundant and nontoxic. It builds on a strong industry on both supply (silicon industry) and product side. This technology has been demonstrated to be functional for over 30 years in the field. The performance degradation, a reduction in power generation due to long-term exposure, is under 1% per year. Silicon modules have a lifespan in the range of 25–30 years but can keep producing energy beyond this range.

Typical overall efficiency of silicon solar panels is between 12% and 18%.

ICoSET UIR 8-10 November 2017, Pekanbaru, Riau, Indonesia ISBN: 978-979-3793-73-3

However, some manufacturers of mono-crystalline panels claim an overall efficiency nearing 20%. This range of efficiencies represents significant variation among the crystalline silicon technologies available. The technology is generally divided into mono- and multi-crystalline technologies, which indicates the presence of grain-boundaries (i.e., multiple crystals) in the cell materials and is controlled by raw material selection and manufacturing technique. Crystalline silicon panels are widely used based on deployments worldwide. Figure 3 shows two examples of crystalline solar panels: mono and multi silicon installed on tracking mounting systems



Figure 3.Mono and multi crystalline solar panels.

3. METHODOLOGY

The research focuses on two cases, an internet café with existing solar panels and an upcoming school facility. In the field study measurements were done on the solar panels of the internet café, to get accurate data, valid for the location. Laboratory work with solar PV has been done at Chalmers to see how angles and reflectors affect the power output. Different sources of climate data for Universitas Islam Riau (UIR) campus has been studied and compared, in order to evaluate which data to use. A literature study was done within the field of stand-alone power systems. Scientific articles were studied to evaluate equations and methods for the dimensioning of solar power systems. Since climate data varies between different sources, the field study includes measurements of the actual generation from solar panels in UIR campus. From these results, which was compared with literature concerning solar radiation, conclusions could be drawn, of which data source that should be used in the research, for the dimensioning of the energy systems. Measurements were also done to evaluate the importance of maintenance of solar panels. The generation by the panels at the internet café was measured before and after cleaning the panels. To evaluate if it is economic to use reflectors the expected increased generation from attached reflectors has been calculated. The reflections from a surface were analyzed in metal а laboratory test. The attachment of the reflectors was designed to suit the panels and the solar path throughout the year, as shows in Figure 4. The required size and cost of the reflectors was evaluated for the cost-comparison.

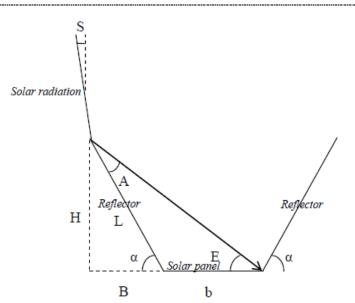


Figure 4.The proposed attachment of reflectors.

Geometrical theory was used to evaluate Equation 1, which was used to calculate the expected increased generation for different solar paths.

$$\mathbf{E} = 2 * \alpha - \mathbf{S} - 90 \tag{1}$$

The angle E means that the reflections will add as an extra light source with the incoming angle E. The increased radiation (R), during solar noon, was calculated with Equation 2.

$$R = \cos (90 - E) * \eta r * \eta surf$$
(2)

The reflection efficiencies (ηr) are evaluated from the results of an experiment by (4). When the increased generation over one full day should be estimated, the solar height and the varying generation over the day are included. Equation 3 was evaluated to estimate the increased generation over one full day (RF).

$$RF = R * \eta 6r + R * \eta 5r + R * \eta 0r$$

(3)

 η 6r is the part of the total daily generation that occurs during the time when all the six panels fully can absorb reflections. η 5r is the part of the generation that occurs when five of the panels are affected by the reflectors. $\eta 0r$ is the part of the generation that occurs when none of the panels are affected by the reflections.

Reflectors lead to an increased temperature, which results in decreased efficiency. The estimated increased temperature (ΔT) and the decreased efficiency per ΔT gives the decreased efficiency. In order to recommend and present a cost-effective energy system, based on solar panels, a few alternative systems have been designed and compared. The systems are designed by estimating the power consumption throughout the year and adapting the power generation to the load. The month with lowest values of insolation was used for dimensioning the generation, in order to cover the electricity demand for every month of the year. Attached reflectors were included in some of the alternatives to give conclusions if reflectors should be recommended to solar power systems. Some of the alternatives use a Maximal Power Point Tracker (MPPT) charge controller, while other uses a regular Pulse Width Modulations (PWM) controller. This gives a conclusion of which investment is preferred.

ICoSET UIR 8-10 November 2017, Pekanbaru, Riau, Indonesia ISBN: 978-979-3793-73-3

The dimensioning of the energy storage differs for the two cases. For the case of the internet café, the energy system mainly works as a backup system during power blackouts. The energy storage was dimensioned to cover the energy demand during one day with a generation at a low level. The low level is defined as the tenth lowest daily irradiation that occurs during one year of climate data. The dimensioning for the school case is based on the expected generation during a *single-day* scenario and a five-day scenario. The single-day scenario is the lowest expected daily irradiation from one year climate data and the five-day scenario is the lowest expected insolation during a period of five days. For the school facility the energy storage was dimensioned to cover the demand at all times, but some of the loads are allowed to be reduced during periods of low generation. This is regulated by reducing the lighting when the battery capacity reaches a level of 70 % and by turning off the charge of two third of the computers when the battery capacity reaches a level of 60 %. The consumption during periods of low generation is therefore dependent of the capacity of the energy storage, since the loads will be reduced at a certain capacity level. The required capacity is in its turn dependent of the consumption.

The expected annual generation and the supply of power, to the loads, during periods of low solar radiation, have been analysed and used as a value of performance for the alternative systems. In case of a period of low insolation, the alternative energy systems, designed for the school facility, will supply the loads with power during different periods of time. The Matlab calculations are used to calculate how long time the computers in the school can be fully used during the *five-day scenario*. This gives a value of performance for the alternative systems. Sensitivity analyses were done to evaluate the robustness of the alternative systems. The robustness of the alternative systems is checked by calculating the Depth of Discharge (DOD) of the battery bank, during periods with low generation, when both the generation and the battery capacity are reduced with 20 %.

To see if the alternative systems, designed for the school facility, can withstand the *single-day scenario* and the five-day scenario, with a 20 % decreased insolation and a 20 % decreased battery capacity, the Matlab calculations was used. For the single-day scenario the required capacity was calculated, with the decreased insolation and reduced capacity. The result was compared with the capacity of the dimensioned energy storage. The expected DOD for the *five-day scenario*, with the decreased insolation and reduced capacity, was received directly from the Matlab calculations. For the economic point of view an investment analysis was done for both cases. The payoff time and the Net Present Value (NPV) were used. The economic and expected lifetime of the system affects the result. A lifetime of 25 years was used for the NPV calculation. The expected interest rate and future electricity price affect the results a lot. The investment analysis was done with interest rates of 10 and 20 % and with an increased electricity price of 5 or 10 % per year.

4. **RESULTS**

Pekanbaru city located in Riau Province continues to grow along with the economic progress, so it is estimated the of Pekanbaru City growth energy consumption will increase. In the assessment of a solar power source, the elevation angle is measured from the angular height of the sun from the horizontal position. Figure 5 shows a map of Pekanbaru city in Riau Province.



Figure 5.Map of Pekanbaru in Riau.

Both height and latitude is measured from sea level. 0 degree elevation occurs at sunrise and 90 degree elevation occurs at midday. The elevation angle varies daily and depends on the latitude of the location which happens every year. The most important of the photovoltaic system parameters is the maximum elevation angle, which is the maximum angle on the horizon at every year. Table 1 shows total of energy generate from sun irradiance in Universitas Islam Riau.

Month	POA irradiance beam after shading and soliling (kWh/mo)	POA tradiance beam nomina (kWh/mo)	POA imadiance (ofar after shading) and soiling ((KWr/mo)	POA imadiance fotal nominal ((KVr/mo)	PV array DC energy (kWr/mo)	System AC energy (kWh/mo)
Lan	294,891.0	310,201.0	1,105,210.0	1,165,240.0	141 523 0	134 856 0
Гео	257,792.0	302,939.0	1,024,700.0	1,079,370 0	131 471 0	124 026 0
Mar	470,827.0	195,397.0	1,355,180.0	1,427,400.0	171 904 0	161 980 0
Apr	522,494.0	549,994.0	1,399,630.0	1,474,190 0	177 423 0	160 438 0
May	830,770.0	874,495.0	1,751,120.0	1,844,280.0	217 771 0	201 057 0
Jun	/29,168.0	767,567.0	1,632,260.0	1,719,130.0	207 482 0	191 694 0
Jul	009,959.0	052,600.0	1,756,750.0	1,850,230.0	221 139 0	204 299 0
Aug	851,714.0	928,120.0	1,800,750.0	1,896,540.0	228 161 0	209 264 0
Sep	820,977.0	864,185.0	1,682,650.0	1,772,170 0	213 616 0	196 184 0
Oct	746,300.0	785,673.0	1,625,290.0	1,711,800.0	205 724 0	190.811.0
Nov	519,556.0	546,935.0	1,355,530.0	1,425,800 0	173 579 0	164 030 0
Dec	252,558.0	276,400.0	1,075,930.0	1,134,410.0	141 288 0	134 228 0

Table 1. Total irradiance of energy

Average annual irradiation long-term, there are two main sources data of solar resources, i.e. data derived from satellites and land-based measurement. Therefore both sources have advantages respectively, and then the selection of data sources will depend on the location PLTS. Land-based location measurement can be used for calibrate data resources from other sources, such as satellites or stations meteorological, to improve accuracy and certainty. Figure 6 shows an estimate monthly potential energy generate by solar photovoltaic.

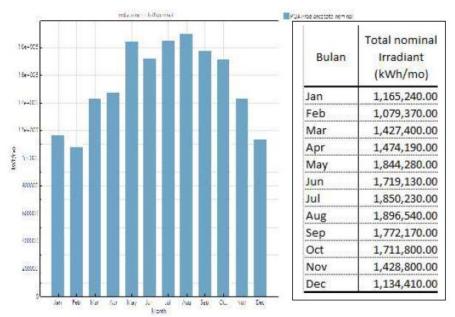


Figure 6. Estimated monthly graph of energy produced

In general, data for 10 years is needed to provide variations at the level reasonable belief. Data used in energy calculations sun for Photovoltaic Power Generation (PLTS) Universitas Islam Riau is the data coming from NASA NREL (National Renewable Energy Laboratory) United States. These data sources have varying quality and resolution. It takes the right skills to interpret the data. Figure 7 shows estimated monthly energy loss due to inconsistence sun light

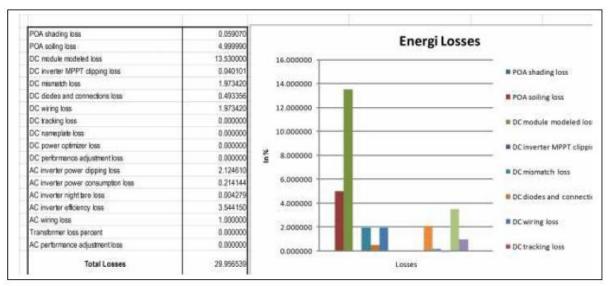


Figure 7. Estimated monthly energy losses

5. CONCLUSION

This feasibility study to find on how much power is able to generate using solar panel photovoltaic in Universitas Islam Riau as shown in results. In order to achieve power generation as much 1 Mega Watt (MW) then 2 hectare of land or empty area is required. Potential to generate as much 1 MW of electricity is benefit for University to reduce expenses or cost of monthly electricity billing, possibility of expand power generate by solar photovoltaic to share to other consumer such as resident, street lighting and other. The feasibility have been done based on environmental of Riau province especially in Pekanbaru City, some of number sun irradiance and duration of sub rise is calculated to achieve accurate data of potential power to generate.

REFERENCES

- G. Papaefthymiou and D. Kurowicka, "Using copulas for modelling stochastic dependence in power system uncertainty analysis," IEEE Trans. Power Syst., vol. 24, no. 1, pp. 40–49, Feb. 2009.
- [2] K. Xie, Y. Li, and W. Li, "Modelling wind speed dependence in system reliability assessment using copulas," IET Renew. Power Gener., vol. 6, no. 6, pp. 392–399, Nov. 2012.
- [3] H. B. Azad, S. Mekhilef, and V. G. Ganapathy, "Long-term wind speed forecasting and general pattern recognition using neural networks," IEEE Trans. Sustain. Energy, vol. 5, no. 2, pp. 546–553, Apr. 2014.
- [4] S. S. Soman, H. Zareipour, O. Malik, and P. Mandal, "A review of wind power and wind speed forecasting methods with different time horizons," in Proc. North Amer. Power Symp., Sep. 2010, pp. 1–8.
- [5] D. Lingfors and J. Wid'en, "Development and validation of a wide-area model of hourly aggregate solar power generation," Energy, vol. 102, pp. 559 – 566, 2016.

- [6] W. Wu, K. Wang, B. Han, G. Li, X. Jiang, and M. L. Crow, "A versatile probability model of photovoltaic generation using pair copula construction," IEEE Trans. Sustain. Energy, vol. 6, no. 4, pp. 1337–1345, Oct. 2015.
- [7] M. Larra^{*}neta, S. Moreno-Tejera, M. Silva-P'erez, and I. Lillo-Bravo, "An improved model for the synthetic generation of high temporal resolution direct normal irradiation time series," Sol. Energy, vol. 122, pp. 517–528, 2015.
- Fern´andez-Peruchena, M. [8] C.M. Gast'on. M. S'anchez, J. Garc'1a-Barberena, M. Blanco, and A. Bernardos, "MUS: A multiscale stochastic model for generating plausible meteorological vears designed for multiyear solar energy vield simulations," Sol. Energy, vol. 120, pp. 244–256, 2015.
- [9] J. Bright, C. Smith, P. Taylor, and R. Crook, "Stochastic generation of synthetic minutely irradiance time series derived from mean hourly weather observation data," Sol. Energy, vol. 115, pp. 229–242, 2015.
- [10] J. Ekstr'om, M. Koivisto, I. Mellin, J. Millar, E. Saarij'arvi, and L. Haarla, "Assessment of large scale wind power generation with new generation locations without measurement data," Renew. Energy, vol. 83, pp. 362–374, 2015.
- [11] J. Ekström, M. Koivisto, J. Millar, I. Mellin, and M. Lehtonen, "A statistical approach for hourly photovoltaic power generation modelling with generation locations without measured data," Sol. Energy, vol. 132, pp. 173–187, 2016.
- [12] M. Marinelli, P. Maule, A. N. Hahmann, O. Gehrke, P. B. Nørg°ard, and N. A. Cutululis, "Wind and photovoltaic large-scale regional models for hourly production evaluation," IEEE Trans. Sustain.

Energy, vol. 6, no. 3, pp. 916–923, Jul. 2015.

- [13] P. E. Bett and H. E. Thornton, "The climatological relationships between wind and solar energy supply in Britain," Renew. Energy, vol. 87 Part 1, pp. 96–110, 2016.
- [14] J. Widen, "Correlations between large-scale solar and wind power in a future scenario for Sweden," IEEE Trans. Sustain. Energy, vol. 2, no. 2, pp. 177–184, Apr. 2011.
- [15] J. Vasilj, P. Sarajcev, and D. Jakus, "Estimating future balancing power requirements in wind–PV power system," Renew. Energy, vol. 99, pp. 369–378, 2016.
- [16] M. Koivisto, J. Ekstr"om, J. Sepp"anen, I. Mellin, J. Millar, and L. Haarla, "A statistical model for comparing future wind power scenarios with varying geographical distribution of installed generation capacity," Wind Energy, vol. 19, pp. 665–679, May 2016.
- [17] M. Koivisto et al., "Wind speed modeling using a vector autoregressive process with a time-dependent intercept term," Int. J. Elect. Power Energy Syst., vol. 77, pp. 91–99, 2016.
- [18] D. Villanueva, A. Feij'oo, and J. L. Pazos, "Simulation of correlated wind speed data for economic dispatch evaluation," IEEE Trans. Sustain. Energy, vol. 3, no. 1, pp. 142–149, Jan. 2012.
- [19] D. C. Hill, D. McMillan, K. R. W. Bell, and D. Infield, "Application of auto-regressive models to U.K. wind speed data for power system impact studies," IEEE Trans. Sustain. Energy, vol. 3, no. 1, pp. 134–141, Jan. 2012.
- [20] H. L'utkepohl, New Introduction to Multiple Time Series Analysis, 2nd ed. Berlin, Germany: Springer-Verlag, 2007.

- [21] J. Hamilton, Time Series Analysis. Princeton, NJ, USA: Princeton Univ. Press, 1994.
- [22] D. A. Dickey and W. A. Fuller, "Likelihood ratio statistics for autoregressive time series with a unit root," Econometrica, vol. 49, no. 4, pp. 1057–1072, 1981.
- [23] A. Harvey, Time Series Models. Rossendale, U.K.: Philip Allan, 1981.
- [24] G. Ljung and G. E. P. Box, "On a measure of lack of fit in time series models," Econometrica, vol. 66, pp. 67–72, 1978.
- [25] B. Tammelin et al., "Production of the FinnishWind Atlas," Wind Energy, vol. 16, no. 1, pp. 19–35, 2013.
- [26] C. Rigollier, O. Bauer, and L. Wald, "On the clear sky model of the ESRA—European Solar Radiation Atlas—with respect to the heliosat method," Sol. Energy, vol. 68, no. 1, pp. 33–48, 2000.
- [27] Solar radiation data (soda) service, Aug. 2016. [Online]. Available: http://www.soda-is.com/eng/services
- [28] Gamesa G128-5.0 MW Wind Turbine Data Sheet, Aug. 2016. [Online]. Available: <u>http://www.gamesacorp.com/recurso</u> <u>s/doc/productos-servicios</u> /aerogenerado res/catalogo-g10x-45mw-eng.pdf
- [29] M. Mattei, G. Notton, C. Cristofari,M.Muselli, and P. Poggi, "Calculation of the polycrystalline PV module temperature using a simple method of energy balance," Renew. Energy, vol. 31, no. 4, pp. 553–567, 2006.
- Aldous, S. *How Solar Cells Work*. Retrieved October, 2008, from http://www.howstuffworks.com/solar -cell.htm
- Ben Arnoldy. (2008). Brighter Future for Solar Panels: Silicon Shortage Eases. Retrieved 1/22, 2009, from http://features.csmonitor.com/innovat

ion/2008/06/05/brighter-future-for-so lar-panels-silicon-shortage-eases/

- CalFinder.*What is net metering?* Retrieved September, 2008, from http://solar.calfinder.com/blog/solar-i nformation/what-is-net-metering/
- Charlie White. (2008). Solar Cell Efficiency Reaches Breakthrough Cost per Watt. Retrieved 1/14, 2009, from

http://dvice.com/archives/2008/03/so lar_cell_effi.php

Code of Massachusetts Regulations.*Massachusetts Net Metering* Laws http://www.dsireusa.org/docum

Laws.http://www.dsireusa.org/docum ents/Incentives/MA01R.htm

- Commonwealth Solar.Non-residential Rebate Calculator.http://www.masstech.org/ SOLAR/Attachment%20A2-Non%2 0Residential%20Solar%20Rebate%2 0Calculator%20Only-070208.xls.
- Commonwealth Solar.*Overview*.Retrieved September, 2008, from http://www.masstech.org/SOLAR/
- Commonwealth Solar. (2008). Solar Photovoltaic Rebates: Program Manual. Retrieved September, 2008, from

http://www.masstech.org/SOLAR/Co mmonwealth%20Solar%20Program %20Handbook_v2_070108.pdf

Cooler Planet.(2008). *How Photovoltaic Cells Work*.Retrieved October, 2008, from

http://solar.coolerplanet.com/Content /Photovoltaic.aspx

- Denis Lenardic.(2009). Photovoltaic Applications and Technologies.Retrieved 10/20, 2008, from www.pvresources.com
- DSIRE.*Massachusetts Incentives for Renewable Energy: Net Metering.* Retrieved November, 2008, from http://www.dsireusa.org/library/inclu des/incentive2.cfm?Incentive_Code= MA01R&State=MA&CurrentPageID =1

- DSIRE.Massachusetts Incentives for Renewable Energy. Retrieved November, 2008, from http://www.dsireusa.org/documents/I ncentives/MA01R.htm
- Energy Information Administration. (2009). Average Retail Prices of Electricity. http://www.eia.doe.gov/emeu/mer/pr ices.html



YAYASAN LEMBAGA PENDIDIKAN ISLAM (YLPI) RIAU UNIVERSITAS ISLAM RIAU

UIR INTERNATIONAL CONFERENCE 2017



INTERNATIONAL CONFERENCE ON SCIENCE, ENGINEERING AND TECHNOLOGY

CERTIFICATE

This is to certify that

EVIZAL ABDUL KADIR

has participated in International Conference on Science, Engineering and Technology (ICOSET) "Sustainable Development in Developing Country" as

PRESENTER

held by Lembaga Penelitian dan Pengabdian Masyarakat (LPPM) Universitas Islam Riau, Indonesia

Pekanbaru, 8-10 November 2017

Dr. Evizal Abdul Kadir, M. Eng Conference Chair



University Partners:

NGUYEN TRAJ UNIVERSIT





YAYASAN LEMBAGA PENDIDIKAN ISLAM (YLPI) RIAU **UNIVERSITAS ISLAM RIAU**

UIR INTERNATIONAL CONFERENCE 2017



INTERNATIONAL CONFERENCE ON SCIENCE, ENGINEERING AND TECHNOLOGY

CERTIFICATE

This is to certify that

EVIZAL ABDUL KADIR

Pekanbaru, 8-10 November 2017

has participated in International Conference on Science, Engineering and Technology (ICOSET) "Sustainable Development in Developing Country" as

CHAIR

held by Lembaga Penelitian dan Pengabdian Masyarakat (LPPM) Universitas Islam Riau, Indonesia SITAS

University Partners:

IGHVEN TRALUNIVERSIT

Z



CHIBA



Dr. Evizal Abdul Kadir, M. Eng Conference Chair