

International Journal of Technology

Volume 8 | Issue 1 | January 2017



www.ijtech.eng.ui.ac.id

Published by Faculty of Engineering, Universitas Indonesia



Stimulating Innovation and Creativity: The Way Forward (<https://ijtech.eng.ui.ac.id/article/view/37>)


Mohammed Ali Berawi

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.7628> (<https://doi.org/10.14716/ijtech.v8i1.7628>)

Pages : 1-4

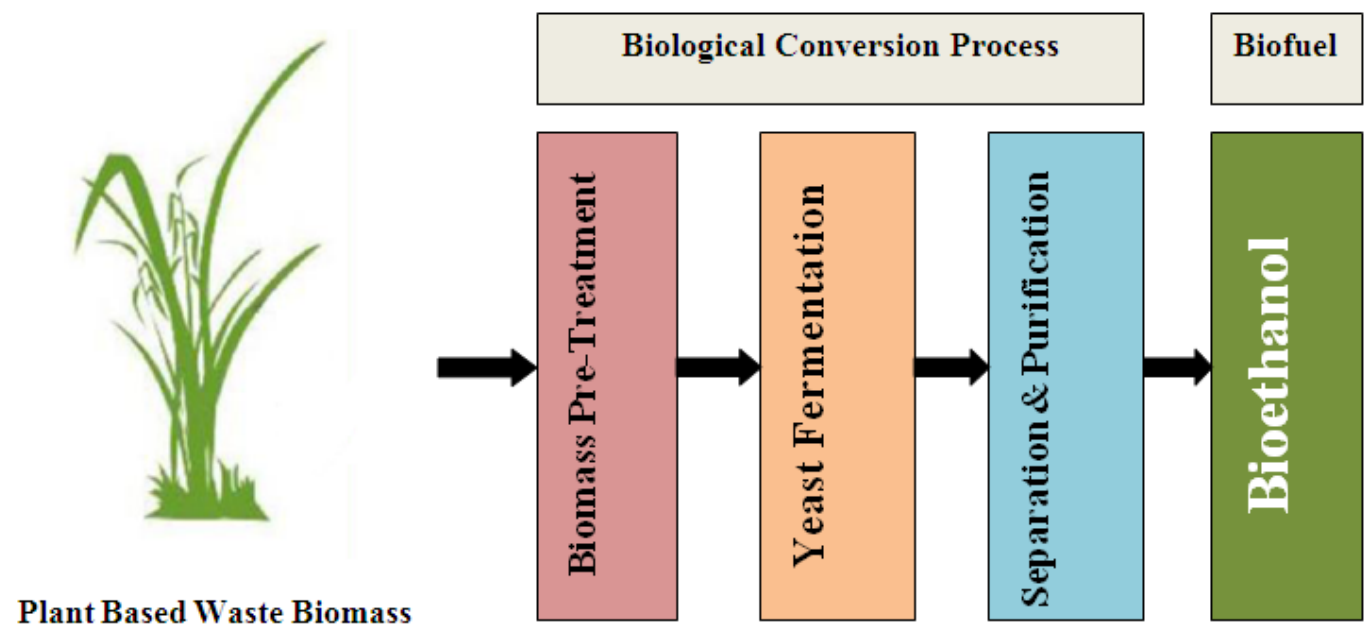

A Review of Bioethanol Production from Plant-based Waste Biomass by Yeast Fermentation (<https://ijtech.eng.ui.ac.id/article/view/38>)


Nazia Hossain, Juliana Haji Zaini, T.M.I. Mahlia

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3948> (<https://doi.org/10.14716/ijtech.v8i1.3948>)

Pages : 5-18

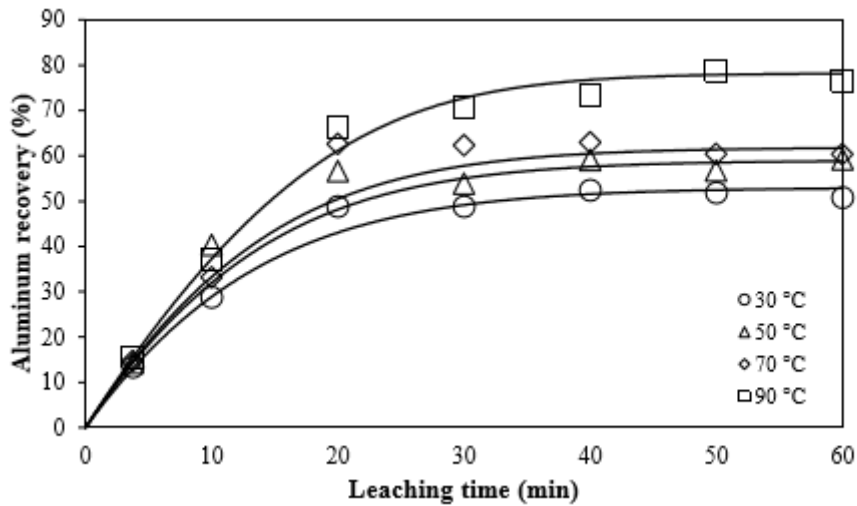

A Modified Shrinking Core Model for Leaching of Aluminum from Sludge Solid Waste of Drinking Water Treatment (<https://ijtech.eng.ui.ac.id/article/view/40>)

Agus Mirwan, Susianto , Ali Altway, Renanto Handogo

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3233> (<https://doi.org/10.14716/ijtech.v8i1.3233>)

Pages : 19-26



Photodegradation of Methylcyclohexane in Two Phases with Modified-titania Immobilized on Pumice (<https://ijtech.eng.ui.ac.id/article/view/219>)

Slamet , Oktrianto , Ratnawati , Salim Mustofa

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3337> (<https://doi.org/10.14716/ijtech.v8i1.3337>)

Pages : 27-36



Isotherm Studies of Pyrogallol-imprinted Polymers via Precipitation Polymerization (<https://ijtech.eng.ui.ac.id/article/view/220>)


Nor Amira Othman, Noor Fadilah Yusof, Rusli Daik, Faizatul Shimal Mehamod

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.5017> (<https://doi.org/10.14716/ijtech.v8i1.5017>)

Pages : 37-47



Sarang Semut (Myrmecodia Pendans) Extract as a Green Corrosion Inhibitor for Mild Steel in Acid Solution (<https://ijtech.eng.ui.ac.id/article/view/221>)


Atria Pradityana, Sulistijono , Abdullah Shahab, Lukman Noerochim

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3400> (<https://doi.org/10.14716/ijtech.v8i1.3400>)

Pages : 48-57



Effect of Annealing Temperature on Microstructure and Mechanical Properties of Ultrafine Grained Brass Produced by Equal Channel Angular Pressing (<https://ijtech.eng.ui.ac.id/article/view/222>)

Suryadi , Andy Pramana Kusuma, Amin Suhadi, Dedi Priadi, Eddy S. Siradj

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.2958> (<https://doi.org/10.14716/ijtech.v8i1.2958>)

Pages : 58-65



Phase Transitions in $\text{La}_{0.73}\text{Ca}_{0.27}\text{Mn}_{1-x}\text{Cu}_x\text{O}_3$ ($0 < X < 0.19$) (<https://ijtech.eng.ui.ac.id/article/view/223>)

Y. E. Gunanto, W. A. Adi, S. Poertadji, T. Ono, H. Tanaka, E. Steven

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.5980> (<https://doi.org/10.14716/ijtech.v8i1.5980>)

Pages : 66-75



Preparation and Characterization of $\text{Fe}_3\text{O}_4/\text{SiO}_2/\text{TiO}_2$ Composite for Methylene Blue Removal in Water (<https://ijtech.eng.ui.ac.id/article/view/224>)

Adel Fisli, Ridwan , Yuni K. Krisnandi, Jarnuzi Gunlazuardi

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.2888> (<https://doi.org/10.14716/ijtech.v8i1.2888>)

Pages : 76-84



Traditional Catamaran Hull Form Configurations that Reduce Total Resistance (<https://ijtech.eng.ui.ac.id/article/view/225>)

Muhammad Iqbal, Samuel

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.4161> (<https://doi.org/10.14716/ijtech.v8i1.4161>)

Pages : 85-93



Parallel-middle-body and Stern-form Relative Significance in the Wake Formation of Single-screw Large Ships (<https://ijtech.eng.ui.ac.id/article/view/227>)


Ketut Suastika, Fajar Nugraha, I Ketut Aria Pria Utama

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3542> (<https://doi.org/10.14716/ijtech.v8i1.3542>)

Pages : 94-103



Modeling of the Crossing Point Temperature Phenomenon in the Low-temperature Oxidation of Coal (<https://ijtech.eng.ui.ac.id/article/view/229>)


Muksin Saleh, Yuswan Muharram, Yulianto S. Nugroho

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.4488> (<https://doi.org/10.14716/ijtech.v8i1.4488>)

Pages : 104-113



Characteristic of LPG Compositions in the Fuel Line during Discharging Process (<https://ijtech.eng.ui.ac.id/article/view/231>)


Muji Setiyo, Sudjito Soeparman, Nurkholis Hamidi, Slamet Wahyudi

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.4117> (<https://doi.org/10.14716/ijtech.v8i1.4117>)

Pages : 114-123



Developing Curve of Displacement Factor for Determination of Additional Modulus of Subgrade Reaction on Nailed-slab Pavement System (<https://ijtech.eng.ui.ac.id/article/view/232>)


Anas Puri

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.1688> (<https://doi.org/10.14716/ijtech.v8i1.1688>)

Pages : 124-133



Wire Rope Flexural Bonded Strengthening System on RC-Beams: A Finite Element Simulation (<https://ijtech.eng.ui.ac.id/article/view/233>)


Yanuar Haryanto, Buntara Sthenly Gan, Agus Maryoto

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.2734> (<https://doi.org/10.14716/ijtech.v8i1.2734>)

Pages : 134-144



Water Quality Index for Determining the Development Threshold of Urbanized Catchment Area in Indonesia (<https://ijtech.eng.ui.ac.id/article/view/234>)


Dwita Sutjiningsih

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3971> (<https://doi.org/10.14716/ijtech.v8i1.3971>)

Pages : 145-159



Prediction of Bus Arrival Times at Bus Stop (<https://ijtech.eng.ui.ac.id/article/view/235>)


Ruslawati Abdul Wahab, Muhamad Nazri Borhan, Riza Atiq Abdullah O.K. Rahmat

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.4026> (<https://doi.org/10.14716/ijtech.v8i1.4026>)

Pages : 160-167



Dual Material Pile Gate Approach for Low Leakage Finfet (<https://ijtech.eng.ui.ac.id/article/view/236>)


Sanjay S. Chopade, Dinesh V. Padole

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3699> (<https://doi.org/10.14716/ijtech.v8i1.3699>)

Pages : 168-176



Improving Mobility of Base Transceiver Station Locating Method using Telegram's Application (<https://ijtech.eng.ui.ac.id/article/view/237>)


Tubagus Mohammad Akhriza, Hizkia Yesarela Sahaduta, Antonius Duty Susilo

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.6012> (<https://doi.org/10.14716/ijtech.v8i1.6012>)

Pages : 177-185



Implementation of 3D HRTF Interpolation in Synthesizing Virtual 3D Moving Sound (<https://ijtech.eng.ui.ac.id/article/view/238>)


Hugeng , Jovan Anggara, Dadang Gunawan

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.6859> (<https://doi.org/10.14716/ijtech.v8i1.6859>)

Pages : 186-195



Windowing System Facial Detection based on Gabor Kernel Filter, Fast Fourier Transform, and Probabilistic Learning Vector Quantization (<https://ijtech.eng.ui.ac.id/article/view/239>)

Arif Muntasa

Publication Date (Online):

Jan 31, 2017

DOI: <https://doi.org/10.14716/ijtech.v8i1.3255> (<https://doi.org/10.14716/ijtech.v8i1.3255>)

Pages : 196-208

About the Journal

- Editorial Board (<https://ijtech.eng.ui.ac.id/people>)
- Focus and Scope (<https://ijtech.eng.ui.ac.id/about/5/focus-and-scope>)
- Online Submissions (<https://ijtech.eng.ui.ac.id/about/3/online-submission>)
- Publication Policy (<https://ijtech.eng.ui.ac.id/about/11/publication-policy>)
- Publication Ethics and Policy (<https://ijtech.eng.ui.ac.id/about/10/policy>)
- Author Guidelines (<https://ijtech.eng.ui.ac.id/about/4/author-guidelines>)
- List of Reviewers (<https://ijtech.eng.ui.ac.id/about/12>)

- Most downloaded papers (<https://ijtech.eng.ui.ac.id/home/mostdownloadedpapers>)
- Most cited papers (<https://ijtech.eng.ui.ac.id/about/14>)

Login

Username

Password

.....


Not as user?

Register (<https://ijtech.eng.ui.ac.id/register>)

LOGIN

 IJTechp-ISSN : 2086-9614 (<https://portal.issn.org/resource/ISSN/2086-9614>)e-ISSN : 2087-2100 (<https://portal.issn.org/resource/ISSN/2087-2100>) Journal Metrics(<https://www.scimagojr.com/journalsearch.php?q=21100235612&tip=sid&exact=no>)

q=21100235612&tip=sid&exact=no)

*Metrics by SCOPUS 2022*CiteScore 2021: **2.4**CiteScoreTracker 2022: **2.0**Source Normalized Impact per Paper (SNIP): **0.744**Acceptance rate: **18.17 %**Average time to publish: **133 days.** IJTech is indexed in(<https://www.scopus.com/sourceid/21100235612>)(<http://www.ebsco.com/index.asp>)(<https://doaj.org/toc/2086-9614>)



SCImago
Journal & Country
Rank

([https://www.scimagojr.com/journalsearch.php?](https://www.scimagojr.com/journalsearch.php?q=21100235612&tip=sid)

[q=21100235612&tip=sid](https://www.scimagojr.com/journalsearch.php?q=21100235612&tip=sid))



([https://journals.indexcopernicus.com/search/details?](https://journals.indexcopernicus.com/search/details?id=31340)

[id=31340](https://journals.indexcopernicus.com/search/details?id=31340))



(<http://www.crossref.org>)




([https://scholar.google.co.id/scholar?](https://scholar.google.co.id/scholar?q=site%3Ahttp%3A%2F%2Fijtech.eng.ui.ac.id)

[q=site%3Ahttp%3A%2F%2Fijtech.eng.ui.ac.id](https://scholar.google.co.id/scholar?q=site%3Ahttp%3A%2F%2Fijtech.eng.ui.ac.id))



([https://mjl.clarivate.com/search-results?issn=2086-](https://mjl.clarivate.com/search-results?issn=2086-9614)

[9614](https://mjl.clarivate.com/search-results?issn=2086-9614))

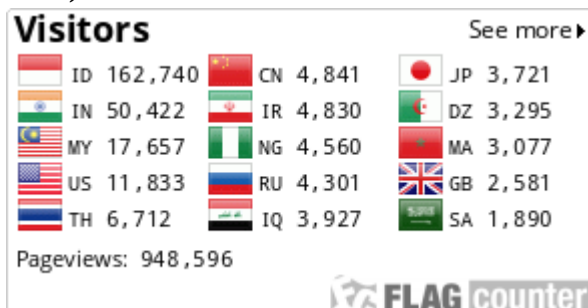

(<http://info.flagcounter.com/AoS7>)

Copyright © 2017 Faculty of Engineering
International Journal of Technology

IJTech secretariat, Engineering Center Bld., 2nd Fl.
Faculty of Engineering, Universitas Indonesia
Depok 16424, Indonesia.

EDITORIAL TEAM

Editor in Chief

1. Prof. Dr. Mohammed Ali Berawi, Universitas Indonesia, Indonesia

Managing Editor

1. Dr. Eny Kusriani, Universitas Indonesia, Indonesia

Members

1. Prof. Dr. Akhmad Herman Yuwono , Universitas Indonesia, Indonesia
2. Prof. Dr. Anwar Usman, Universiti Brunei Darussalam, Brunei Darussalam
3. Prof. Dr. Bambang Sugiarto, Universitas Indonesia, Indonesia
4. Dr. Cecilia Vale, University of Porto, Portugal
5. Prof. Dr. Dedi Priadi, Universitas Indonesia, Indonesia
6. Dr. Eko Adhi Setiawan, Universitas Indonesia, Indonesia
7. Prof. Dr. Esah Hamzah, Universiti Teknologi Malaysia, Malaysia
8. Dr. Giuseppe Lo Papa, Teagasc Rural Economy Research Centre, Ireland
9. Prof. Dr. Hamzah Abdul Rahman, Universiti Malaya, Malaysia
10. Dr. Hendri Dwi Saptioratri, Universitas Indonesia, Indonesia
11. Prof. Dr. Heri Hermansyah, S.T., M.Eng., IPU, Universitas Indonesia, Indonesia
12. Dr. Hng Huey Hoon, Nanyang Technological University, Singapore , Singapore
13. Dr. Imam Jauhari Maknun, Universitas Indonesia, Indonesia, Indonesia
14. Prof. Dr. Isti Surjandari, Universitas Indonesia, Indonesia
15. Dr. Johannes Widodo, National University of Singapore, Singapore
16. Prof. Dr. Jong-Taek Oh, Chonnam National University, Korea, Republic of
17. Dr. Lee Wilson, University of Saskatchewan, Canada
18. Dr. Muhamad Asvial, Universitas Indonesia, Indonesia
19. Dr. Muhamad Sahlan, Universitas Indonesia, Indonesia
20. Dr. Muhammad Arif Budiyanto, Universitas Indonesia, Indonesia
21. Prof. Dr. Muhammad Idris Saleh, Universiti Sains Malaysia, Malaysia
22. Dr. Muhammad Suryanegara, Universitas Indonesia, Indonesia
23. Prof. Dr. Nandy Putra, Universitas Indonesia, Indonesia
24. Dr. Nofrijon Sofyan, Universitas Indonesia, Indonesia
25. Dr. Nyoman Suwartha, Universitas Indonesia, Indonesia
26. Prof. Paramita Atmodiwiryo, Universitas Indonesia, Indonesia
27. Prof. Dr. Prof. Dr. Hideaki Ohgaki, Kyoto University, Japan
28. Prof. Dr. Raimundo Delgado, University of Porto, Portugal
29. Dr. Reza Kia, Sharif University of Technology, Iran (Islamic Republic of)
30. Dr. Roy Woodhead, Sheffield Hallam University, United Kingdom
31. Prof. Rui Calcada, University of Porto, Portugal
32. Dr. Ruki Harwahyu, Universitas Indonesia, Indonesia
33. Dr. Sam P. Sinha, Scientific Research & Development, United States
34. Prof. Dr. Simon P. Ringer, University of Sydney, Australia
35. Prof. Sri Harjanto, Universitas Indonesia, Indonesia
36. Prof. Dr. Sutrasno Kartohardjono, Universitas Indonesia, Indonesia
37. Prof. Dr. T. Yuri M. Zagloel, Universitas Indonesia, Indonesia
38. Prof. Dr. Toshio Shudo, Tokyo Metropolitan University, Japan

39. Prof. Dr. Yandi Andri Yatmo, Universitas Indonesia, Indonesia
40. Dr. Yudan Whulanza, Universitas Indonesia, Indonesia
41. Prof. Dr. Yung- Hui Lee, National Taiwan University, Taiwan
42. Dr. Yung-Jung Hsu, National Chiao Tung University, Taiwan

About the Journal

- Editorial Board (<https://ijtech.eng.ui.ac.id/people>)
- Focus and Scope (<https://ijtech.eng.ui.ac.id/about/5/focus-and-scope>)
- Online Submissions (<https://ijtech.eng.ui.ac.id/about/3/online-submission>)
- Publication Policy (<https://ijtech.eng.ui.ac.id/about/11/publication-policy>)
- Publication Ethics and Policy (<https://ijtech.eng.ui.ac.id/about/10/policy>)
- Author Guidelines (<https://ijtech.eng.ui.ac.id/about/4/author-guidelines>)
- List of Reviewers (<https://ijtech.eng.ui.ac.id/about/12>)

- Most downloaded papers (<https://ijtech.eng.ui.ac.id/home/mostdownloadedpapers>)
- Most cited papers (<https://ijtech.eng.ui.ac.id/about/14>)

Login

Username

Password

Not as user?

Register (<https://ijtech.eng.ui.ac.id/register>)

LOGIN

IJTech

p-ISSN : 2086-9614 (<https://portal.issn.org/resource/ISSN/2086-9614>)

e-ISSN : 2087-2100 (<https://portal.issn.org/resource/ISSN/2087-2100>)

Journal Metrics

DEVELOPING CURVE OF DISPLACEMENT FACTOR FOR DETERMINATION OF ADDITIONAL MODULUS OF SUBGRADE REACTION ON NAILED-SLAB PAVEMENT SYSTEM

Anas Puri^{1*}

¹*Departement of Civil Engineering, Faculty of Engineering, Universitas Islam Riau,
Pekanbaru 28284, Indonesia*

(Received: August 2015 / Revised: November 2016 / Accepted: January 2017)

ABSTRACT

The pavement of the nailed-slab system has been proposed as an alternative solution for addressing the rigid pavement problem in soft soils. This system is used for developing a rigid pavement. The simple method of using an equivalent modulus of subgrade reaction (k') in nailed-slab system analysis was proposed by a previous researcher. This modulus consists of the modulus of subgrade reaction from a plate load test (k) and an additional modulus of subgrade reaction due to pile installing (Δk). The additional modulus of subgrade reaction has been proposed by some authors. The displacement factor was used in determining the additional modulus of subgrade reaction. This factor is difficult to define. In this research, the prototype test of a nailed slab with single-pile installation was conducted to learn the validation of the theory of the additional modulus of subgrade reaction on a full-scale dimension. The prototype was constructed on soft clay, and the connection between the pile and slab was perfect monolithically. This system was loaded by centric load. A new curve of the displacement factor is proposed. Calculated deflections based on this curve were compared to the observed deflection and resulted in good agreement with the observation. Hence, it can be used in preliminary design.

Keywords: Displacement factor; Nailed-slab system; Rigid pavement; Soft clay; Subgrade modulus

1. INTRODUCTION

The new proposed method, which Hardiyatmo (2008) introduced, was developed from the pavement of the *Sistem Cakar Ayam Modifikasi* (CAM) by changing the cylindrical foundation with short micro piles. The new system is called the nailed-slab system. Hardiyatmo (2008) conducted several studies on a nailed slab under dynamic loads, and studies on vertical loadings were done by Hardiyatmo (2009; 2011a), Nasibu (2009), Dewi (2009), Taa (2010), Somantri (2013), and Puri et al. (2011a; 2011b; 2012a; 2012b; 2013a; 2013b; 2013c; 2013d). Hardiyatmo (2011a) proposed an analysis method for determining the additional modulus of subgrade reaction. The additional modulus of subgrade reaction is the additional modulus developed by a pile. Meanwhile, the modulus of subgrade reaction is the modulus considered from a slab. Puri et al. (2012a) modified the Hardiyatmo method by considering the tolerable deflection or allowable deflection of a pavement slab (δ_a) as an approach to safety construction. This modified method has good validation (Puri et al., 2013c).

*Corresponding author's email: anaspuri@eng.uir.ac.id, Tel. +62-761-73848, Fax. +62-761-73848
Permalink/DOI: <https://doi.org/10.14716/ijtech.v8i1.1688>

Hardiyatmo (2011a) used the displacement factor for determining the additional modulus of subgrade reaction. The displacement factor is the ratio of the relative displacement between piles and soils (δ_0) and the pile head settlement (δ_p). The pile head settlement is assumed to be similar to the slab deflection (δ_s). The inverse of the displacement factor is the ratio of δ/δ_0 . Hardiyatmo (2011b) developed the curve of the δ/δ_0 ratio based on the full-scale test of a single pile in stiff clay. The pile and slab were connected by bolts. In this paper, the curve of the δ/δ_0 ratio based on a full-scale test of a single-pile nailed slab in soft clay is developed. The pile and slab were connected monolithically. The curve of the δ/δ_0 ratio is also presented as the curve of the displacement factor. Validation based on the single-pile nailed slab will be explained.

The analytical approach in determining the equivalent modulus of subgrade reaction (k') is given as follows (Hardiyatmo, 2011a; Dewi, 2009; Puri et al., 2012a):

$$k' = k + \Delta k \quad (1)$$

where k is the modulus of subgrade reaction from plate load test (kN/m^3) and Δk is the additional modulus of subgrade reaction due to pile installation under slab (kN/m^3). The modulus of subgrade reaction from a plate load test (k) is usually taken by using a circular plate, and it should be corrected to the slab shape of the nailed slab. The secant modulus is recommended. Hardiyatmo (2011a) proposed Equation 2 in determining the additional modulus of subgrade reaction (Δk). The relative displacement between the pile and soil is considered.

$$\Delta k = \frac{\delta_0 A_s}{\delta_s^2 s^2} (a_d c_u + p_o' K_d \tan \phi_d) \quad (2)$$

where δ_0 is the relative displacement between pile and soil (m), δ_s is the deflection of surface of slab (m), A_s is the surface area of pile shaft (m^2), s is the pile spacing (m), a_d is the adhesion factor (non-dimensional), c_u is the undrained cohesion (kN/m^2), p_o' is the average effective overburden pressure along pile (kN/m^2), K_d is the coefficient of lateral earth pressure in pile surroundings (non-dimensional), and ϕ_d is the soil internal friction angle (degree).

Hardiyatmo (2011b) re-published the relation between δ_0/δ_s and slab deflection for a full-scale model (Figure 1) while the pile and slab were connected by a bolt. The pile diameter was 20 cm, and the length of the pile varied between 1.0 m and 2.0 m.

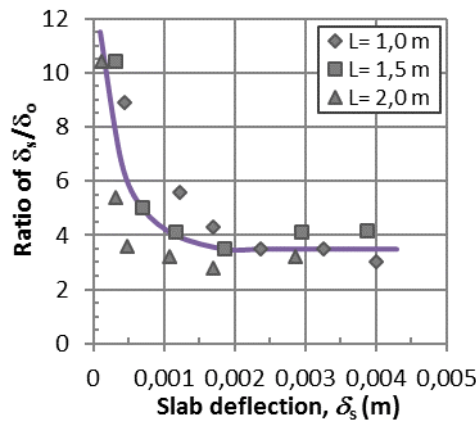


Figure 1 Relationships of δ_s/δ_0 ratio vs. slab deflection (Hardiyatmo, 2011b)

In the case of the nailed-slab system, the relative displacement between the pile and soil is difficult to define. Puri et al. (2012a) obtained Equation 3 to calculate the additional modulus of subgrade reaction, which considered the tolerable deflection of a rigid pavement slab (δ_a).

$$\Delta k = \frac{0.4 f_s A_s}{\delta_a A_{ps}} \quad (3)$$

where δ_a is the tolerable deflection of rigid pavement slab (m), f_s is the ultimate unit friction resistance of pile shaft (kN/m²), and A_{ps} is the area of slab zone supported by single pile (m²).

This equation did not yet consider differential settlement. The maximum differential settlement that a concrete pavement can tolerate may be expressed in terms of angular distortion or the allowable strain in the concrete. Equation 3 is already validated based on the full-scale test with good results (Puri et al., 2013c). With a nailed slab resting on soft soils, the ignored end-bearing resistance of the pile should be considered.

2. TESTING INVESTIGATION

2.1. Soil Pond, Materials, and Dimensions of Single-pile Nailed Slab

The research study on the nailed slab was conducted on soft clay. A soil pond with a width of 6m×3.7m and a depth of 2.5 m was filled with soft clay. The two longer sides were retained by masonry walls and supported by a temporary girder. An anchorage system was built near the pond. Separator sheets were set on the pond walls and on the base to avoid the effects of the surrounding soils. Soft clay taken from the District Ngawi, East Java, Indonesia, was used to fill the pond to a depth of 2.15 m. The soft clay's properties are presented in Table 1, which Puri et al. (2013c) already published. The slab and pile were reinforced concrete. The concrete strength of the slab and pile were 29.2 MPa and 17.4 MPa, respectively.

The dimensions of the nailed slab were 1.20m×1.20m, and 0.15 m in slab thickness (Figure 2), and the slab was stiffened by installing micro piles underneath it. The micro piles' dimensions were 0.20 m in width and 1.50 m in length. The pile was installed under the slab and connected monolithically by using thickening slab connectors (0.40m×0.40m and 0.20 m in thickness). There was a 5-cm lean concrete thickness under the slab.

2.2. Testing Procedures

The steps in the construction of a nailed slab can be briefly described as follows: The pond was filled with soft clay until the soil thickness reached 2.15 m (a detailed procedure was described in Puri et al., 2013c). The soft clay was spread to about 15 cm in thickness per layer with controlled water content (about 55%), and then, it was compacted by three passings of manual compaction. Some soil investigations were conducted, i.e., soil boring, vane shear test, CBR test, and plate load test. After that, a pile was driven by the pre-drilled method and then continued via hydraulic jacking until the pile top reached the design level. The pile was tested for compression-bearing capacity and tension capacity. The pile compression test was loaded by a hydraulic jack via a circular plate with 20 cm in diameter (same as the pile diameter). The pile tension test was loaded by a hydraulic jack via a loading yoke on the pile head. The yoke was put on the pile hook that was welded on the pile head. Soil was excavated for the thickening of the slab. The 5-cm lean concrete was then poured onto the soil surface. The slab reinforcement rebar was assembled. Then, concrete was poured for the slab. The slab was cured by using a wet carpet, and when the concrete age was 28 days, the loading setup was assembled. The loading test was conducted on the slab for different load positions. Loads were transferred to the slab surface by a hydraulic jack via a circular plate that was 30 cm in diameter (the plate represents the single-wheel load contact area). The loading position was centric of the slab. Then, the deflections on the slab were recorded by using a dialgauge. Deflections were observed for every corner and center of the slab surface. Some photographs in construction and testing were presented in Figure 3. The test for the slab alone was done by using a similar procedure but without slab thickening. The slab thickness was the same as that of the single-pile nailed slab.

Table 1 Soft clay properties (Puri et al., 2013c)

No.	Parameter	Unit	Average
1.	Specific gravity, G_s	-	2.55
2.	Consistency limits:		
	- Liquid limit, LL	%	88.46
	- Plastic limit, PL	%	28.48
	- Shrinkage limit, SL	%	9.34
	- Plasticity index, PI	%	59.98
	- Liquidity index, LI	%	0.36
3.	Water content, w	%	54.87
4.	Fines content	%	92.93
5.	Sand content	%	6.89
6.	Bulk density, γ	kN/m^3	16.32
7.	Dry density, γ_d	kN/m^3	10.90
8.	Undrained shear strength, s_u		
	- Undisturbed	kN/m^2	20.14
	- Remolded	kN/m^2	11.74
9.	CBR	%	0.83
10.	Soil classification:		
	- AASHTO	-	A-7-6
	- USCS	-	CH

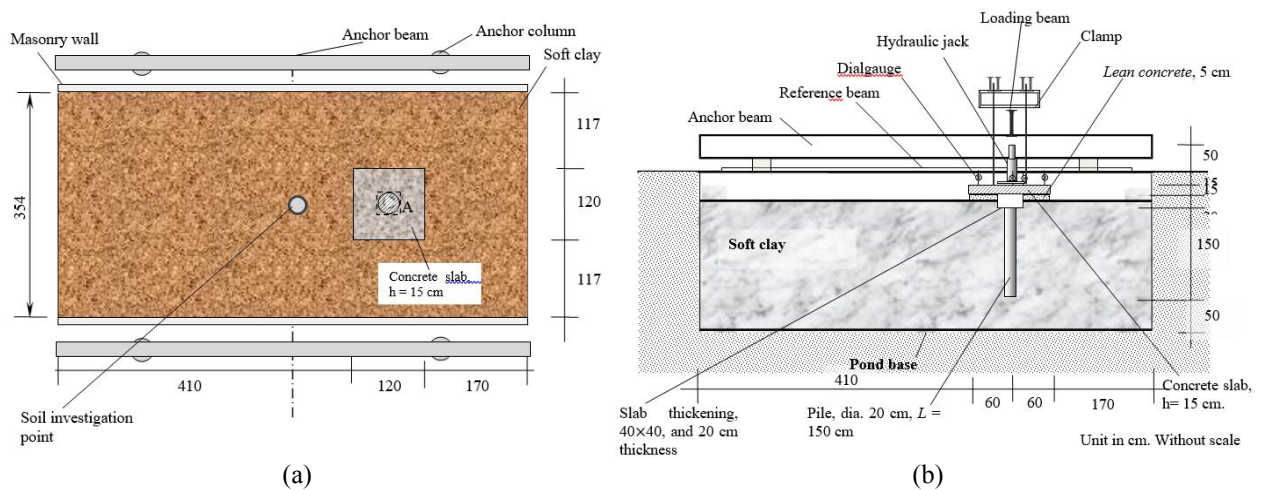


Figure 2 Schematic diagram of testing investigation: (a) plan view; (b) cross section and loading equipment



Figure 3 Photographs of investigation on single-pile nailed-slab system: (a) slab reinforcement; (b) loading test

2.3. Develop the Curve of Displacement Factor

The curve of the displacement factor will be developed by using the Hardiyatmo method. The displacement factor is the ratio between the relative displacement between the pile and soil and the displacement of the pile head (Hardiyatmo, 2011a). This factor is

$$\alpha = \frac{\delta_0}{\delta_p} \quad (5)$$

The δ_p is the displacement of the pile head (m). Because the soft clay is considered, the term of $p_0 K_d \tan \phi_d = 0$, and Equation 2 can be re-arranged as Equation 6.

$$\frac{\delta_0}{\delta_s} = \frac{\Delta k \delta_s A}{A_s a_d c_u} \quad (6)$$

To find the displacement factor, Equation 6 is used by assuming that the displacement of the pile head is equal to the displacement of the slab surface.

An analysis of the deflection was calculated by the theory of beams on elastic foundation (BoEF). This method could be used to calculate the deflections due to the load acting on the plate-supported piles (Hardiyatmo, 2009, 2011a; Taa, 2010; Puri et al., 2011b, 2012a). They used Hetenyi's formulas (1974). The deflection of the finite length of the beam resting on an elastic foundation was considered due to a single concentrated load. The modulus of subgrade reaction, k , is replaced by k' in Equation 1 for the analysis of the nailed-slab system. BoEFW simple software is used to analyze slab deflections.

3. RESULTS AND DISCUSSION

3.1. Single-pile Loading Test

Figure 4 shows the results of the loading tests. Testing was conducted after 30 days of pile driving. For the loading test, the single pile did not reach a failure condition until it reached the beginning of the plastic zone. Pile axial compression-bearing capacity is 28 kN and has linear elastic behavior up to 25 kN (Figure 5a). Tension-bearing capacity is 20 kN (Figure 4b). The relationship between unit friction (based on the pile tension test) and displacement is shown in Figure 4c. The ultimate unit friction f_{su} is 21.21 kPa at a displacement of 0.715 mm. The unit friction was corrected to a pile weight (1.13 kN) and loading yoke weight (0.18 kN).

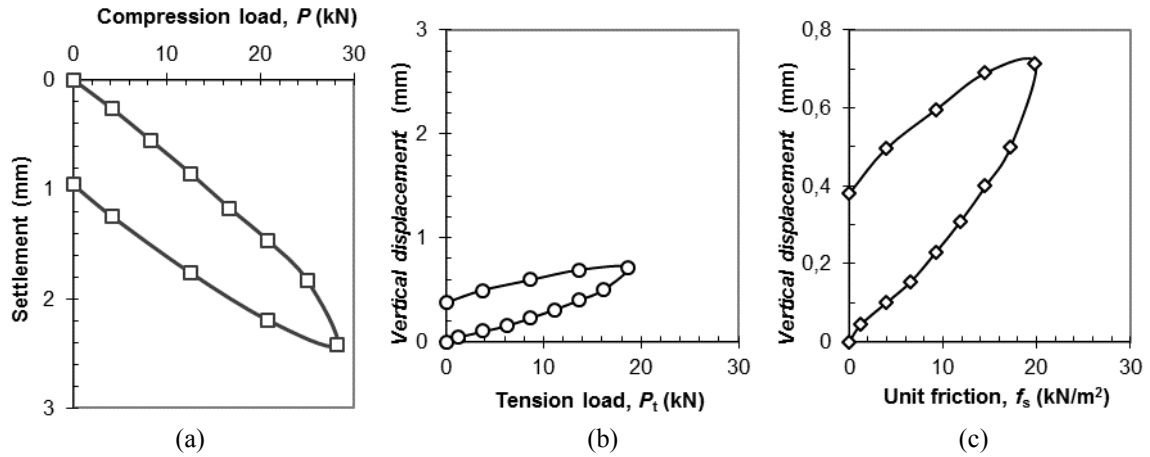


Figure 4 Single-pile test results: (a) axial compression; (b) axial tension; (c) pile unit friction

3.2. Loading Test Results of Slab and Single-pile Nailed Slab

Figure 5 shows the P - δ relationship for both tests. The installed pile under the slab reduced slab settlement and increased the bearing capacity of the structure. The elastic condition reached about 25 kN and 30 kN for the slab alone and the nailed slab, respectively. However, the nailed slab is stiffer than the slab alone is.

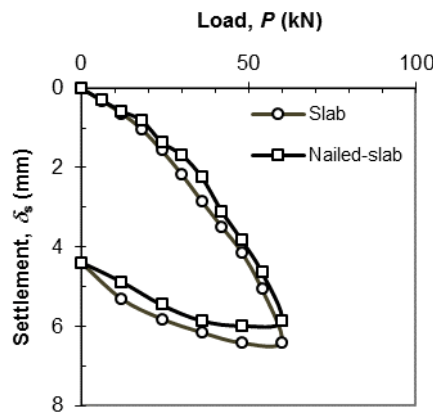


Figure 5 P - δ relationship for loading tests of slab and single-pile nailed slab

3.3. Curve of Displacement Factor α (ratio of δ_0/δ_s)

Based on the loading tests of the slab and single-pile nailed slab, the modulus of subgrade reaction was calculated for the slab alone (k) and for the nailed slab (k'). The additional modulus of subgrade reaction for the nailed slab (Δk) was defined. Those moduli are presented in Figure 6 and will be used for calculating the slab deflection by using Hardiyatmo's formula (2011a).

The ratio of δ_s/δ_0 was calculated by using Equation 6, and the additional modulus of subgrade reactions Δk (as presented in Figure 6) were used. For soft clay, the $p_0 K_d \tan \phi = 0$. Then, the displacement factor (δ_0/δ_s) was taken by inverting the δ_s/δ_0 ratio. For the dimensions of the pile, the pile area $A = 1.44 \text{ m}^2$, and the pile skin area $A_s = 1.07 \text{ m}^2$. The $a_d c_u = f_s$ was determined based on Figure 5c. The δ_s/δ_0 ratio for the single-pile nailed slab could be determined, and the calculated results are present in Figure 7a. This figure shows the distribution of the δ_s/δ_0 ratio. This curve is similar to that in Figure 1, especially for the pile length of 1.5 m and 2.0 m, where the δ_s/δ_0 ratio decreases to a displacement of 2 mm and then tends to increase after this displacement. For general purposes, Figure 7a is presented as Figure 7b (curve of the

displacement factor) and is related to the δ_s/D ratio. D is the pile diameter. The δ_0/δ_s ratio has a maximum value at the maximum displacement of 2 mm ($\delta_s/D = 0.10$).

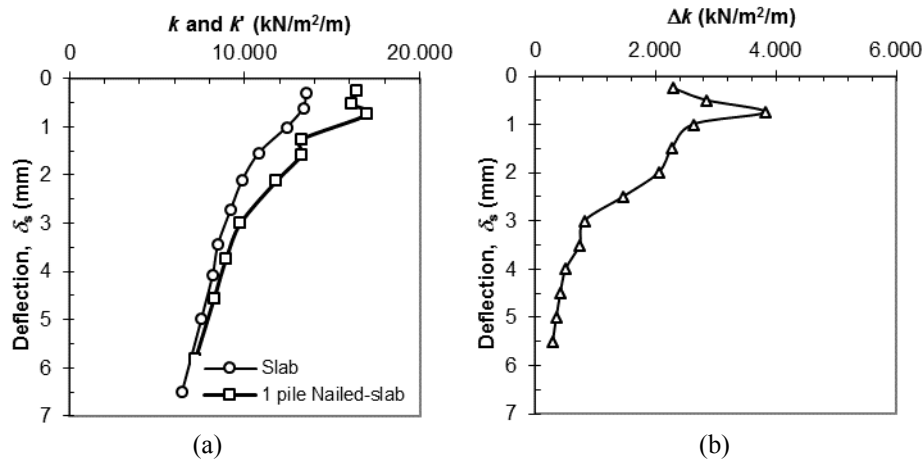


Figure 6 Modulus of subgrade reaction: (a) distribution of k and k' ; (b) modulus Δk

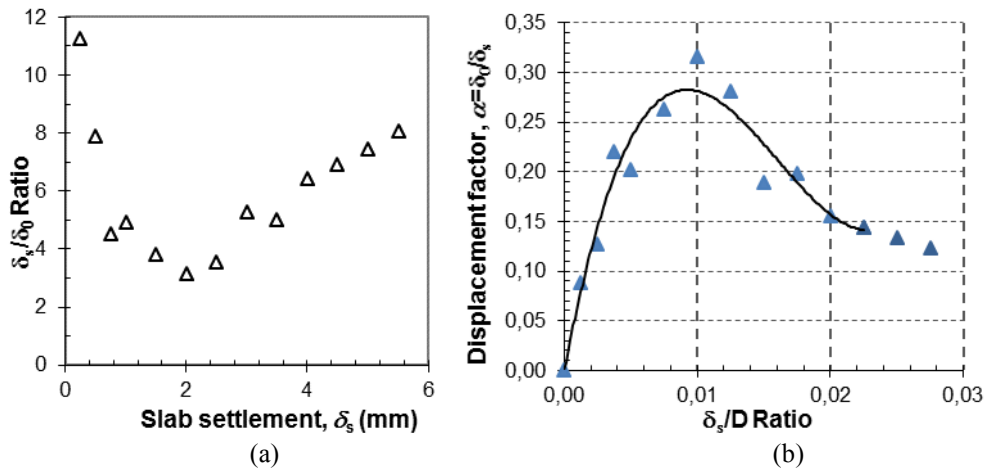


Figure 7 Curve for single-pile nailed slab: (a) δ_s/δ_0 vs. δ_s ; (b) curve of δ_0/δ_s

The mechanism of the relative displacement between soils and the pile (δ_0) is related to the slab deflection (δ_s). The δ_0 is not directly mobilized at the beginning of the slab deflection's occurrence. It will begin to take place in the curtain of the slab deflection. The δ_0 is smaller than the slab deflection at the beginning of the loading; hence, the α is small. Because the load is increased, the δ_s increases and δ_0 increases until the maximum value is reached. Hence, α tends to increase until the maximum value. Then, increasing the slab deflection makes the soils and pile move simultaneously with the slab. It causes the α to decrease to zero (at least the asymptote to the δ_s axis) because the δ_0 reaches the maximum, whereas the δ_s goes in the direction.

3.4. Slab Deflection

The additional modulus and equivalent modulus of subgrade reaction are shown in Figure 8a. The unit friction f_s takes the ultimate value (21.21 kPa) for deflection > 0.7 mm. The k value is taken from Figure 6 by the interpolating method for appropriate deflection. It is shown that all methods are in good agreement with the observation. Figure 8b shows that the use of Hardiyatmo's curve and this research curve (Figure 7b) produces deflection results that are in

good agreement with the observation, even though it is a little bit underestimated. The calculated deflection based on Puri et al.'s (2012a) formula is also in good agreement with the observation, even though it is more underestimated. Figure 8b shows that the use of Hardiyatmo's curve and this research curve (Figure 7b) produces deflection results that are in good agreement with the observation, even though it is a little bit underestimated. The calculated deflection based on Puri et al.'s (2012a) formula is also in good agreement with the observation, even though it is more underestimated.

In the Puri et al. (2012a) formula, the observed deflections were used as tolerable deflections. In the case where the tolerable deflection is determined to be 5 mm, then the $\Delta k = 1,109.87 \text{ kN/m}^2/\text{m}$, and $k' = 7,988.19 \text{ kN/m}^2/\text{m}$. According to Figure 8a (Puri et al., 2012a formula), the overestimated deflection for a load less than 60 kN is obtained. It is caused by a k' lower than that in Figure 8a. It can be concluded that the use of defined tolerable deflection will produce calculation results in a safer zone. All calculated deflections are underestimated. However, using figures 1 and 7b gives the smallest differentiation in the averages of -0.66% and -2.54%, respectively, whereas the Puri et al. (2012a) formula is sufficient enough (average differentiation of -17.89%). In this case, the Poisson's ratio did not influence the slab deflections. The BoEF analysis is in two dimensional (2D). In fact, Poisson's ratio can influence the inner stresses. Hence, the failure criteria of the slab will increase. This means that the preliminary design by using Figure 7b will be on the safety zone.

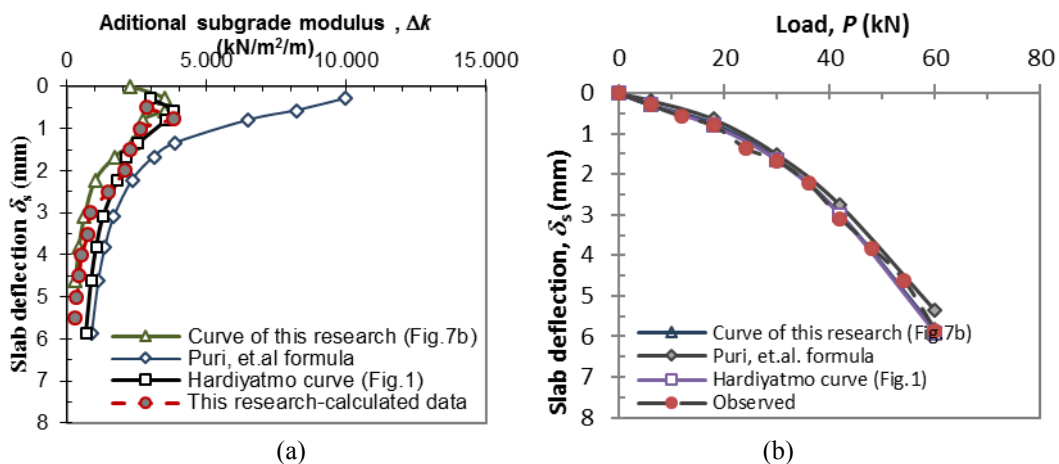


Figure 8 (a) The $\Delta k - \delta$ relationship based on several methods; (b) the $P - \delta$

4. CONCLUSION

According to the results and discussion, it can be concluded that the installed piles under the slab contribute to increasing the modulus of subgrade reaction, which is represented by the additional modulus of subgrade reaction. The equivalent modulus of subgrade reaction of the single-pile nailed slab on soft clay was about 1.14 times the modulus of subgrade reaction of the slab alone. Puri et al.'s (2012a) formula, expressed as Equation 3 and the curve of the displacement factor from this research (Figure 7b), is useful for estimating the additional modulus of subgrade reaction. Calculated deflections based on these methods were in good agreement with the observation. Hence, they can be used in preliminary design. For further research, an additional modulus of subgrade reaction for the edge load should be developed in conjunction with the idea that edge loads can cause critical loading.

5. ACKNOWLEDGEMENT

The author would like to express his gratitude to Professor Hary Christady Hardiyatmo, Profesor Bambang Suhendro, and Associate Professor Ahmad Rifa'i in the Civil and Environmental Engineering Department, Gadjah Mada University for their valuable discussion.

6. REFERENCES

- Dewi, D.A., 2009. Study on Effect of Single Pile Due to the Value of Equivalent Modulus of Subgrade Reaction from Full-scale Loading Tests. *Master's Thesis*, Graduate Program Gadjah Mada University, Yogyakarta, Indonesia
- Hardiyatmo, H.C., 2008. Nailed-slab System for Reinforced Concrete Slab on Rigid Pavement. *In: Proceedings of the National Seminar on Appropriate Technology for Handling Infrastructures*, MPSP JTSL FT UGM, Yogyakarta, Indonesia, pp. M1–M7
- Hardiyatmo, H.C., 2009. Method to Analyze the Slab Deflection by using Equivalent Modulus of Subgrade Reaction for Flexible Slab Structure. *Dinamika Teknik Sipil*, Volume 9(2), pp. 149–154
- Hardiyatmo, H.C., 2011a. Method to Analyze the Deflection of the Nailed Slab System. *IJCEE-IJENS*, Volume 11(4), pp. 22–28
- Hardiyatmo, H.C., 2011b. *Designing of Pavement Roads and Soil Investigation: Flexible Pavement, Rigid Pavement, Modified Chicken Foot Foundations, Nailed-slab System*. Gadjah Mada University Press, Yogyakarta, Indonesia
- Hetenyi, M., 1974. *Beams on Elastic Foundation: Theory with Applications in the Fields of Civil and Mechanical Engineering*. The University of Michigan Press, Ann Arbor, Michigan, USA
- Nasibu, R., 2009. Study on Modulus of Subgrade Reaction due to Effect of Pile Attached under Plate (Loading Test on Full Scale). *Master's Thesis*, Graduate Program Gadjah Mada University, Yogyakarta, Indonesia
- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A., 2011a. Experimental Study on Deflection of Slab which Reinforced by Short Friction Piles in Soft Clay. *In: Proceedings of the 14th Annual Scientific Meeting (PIT) HATTI*, pp. 317–321
- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A., 2011b. Contribution of Wall Barrier to Reduce the Deflection of Nailed-slab System in Soft Clay. *In: Proceedings of the 9th Indonesian Geotech. Conf. and 15th Annual Scientific Meeting (KOGEI IX & PIT XV) HATTI*, pp. 299–306
- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A., 2012a. Determining Additional Modulus of Subgrade Reaction based on Tolerable Settlement for the Nailed-slab System Resting on Soft Clay. *IJCEE-IJENS*, Volume 12(3), pp. 32–40
- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A., 2012b. Application of the Additional Modulus of Subgrade Reaction to Predict the Deflection of Nailed-slab System Resting on Soft Clay due to Repetitive Loadings. *In: Proceedings of Pertemuan Ilmiah Tahunan ke-16 (PIT) HATTI*, pp. 217–222
- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A., 2013a. Pile Spacing and Length Effects due to the Additional Modulus of Subgrade Reaction of the Nailed-slab System on the Soft Clay. *In: Proceedings of the 13th International Symposium on Quality in Research (QiR)*, pp. 1032–1310
- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A., 2013b. Deflection Analysis of Nailed-slab System which Reinforced by Vertical Wall Barrier under Repetitive Loadings. *In: Proceedings of the 6th Civil Engineering Conference in Asian Region (CECAR6)*, pp. TS6-10-TS6-11

- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A. 2013c. Application of the Method of Nailed-slab Deflection Analysis on Full Scale Model and Comparison to Loading Tests. *In: Proceedings of Konferensi Nasional Teknik Sipil ke-7 (KoNTekS7)*, pp. G201–G211
- Puri, A., Hardiyatmo, H.C., Suhendro, B., Rifa'i, A. 2013d. Behavior of Fullscale Nailed-Slab System with Variation on Load Positions. *In: Proceedings of the 1st International Conference on Development Infrastructure (ICID)*, pp. 26–36
- Somantri, A.K., 2013. Kajian Lendutan Pelat Terpaku pada Tanah Pasir dengan Menggunakan Metode Beam on Elastic Foundation (BoEF) dan Metode Elemen Hingga. *Master's Thesis*, Program Studi Teknik Sipil, Program Pascasarjana UGM, Yogyakarta
- Taa, P.D.S., 2010. Effects of Installation of Group Pile due to Slab Uplift of Nailed-slab Resting on Expansive Subgrade. *Master's Thesis*, Graduate Program Gadjah Mada University, Yogyakarta, Indonesia

Only the largest TEDx stages

TED Talk Coaching

Get booked on the largest TEDx stages, with an impactful message, in just 2-3 applications

virmessagelab.com

OPEN

International Journal of Technology

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
<div>Indonesia</div> <div>Universities and research institutions in Indonesia</div>	<div>Business, Management and Accounting</div> <div>Management of Technology and Innovation Strategy and Management</div> <div>Engineering Engineering (miscellaneous)</div>	<div>Faculty of Engineering Universitas Indonesia</div> <div>University of Indonesia in Scimago Institutions Rankings</div>	17

PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Journals	20869614	2010-2021	<div>Homepage</div> <div>How to publish in this journal</div> <div>ale.berawi@gmail.com</div>

Journal Cover Letter Templates

Open

Journal Cover Letter Templates

American Journal Experts

SCOPE



International Journal of Technology aims to provide cutting-edge research and practices in the management and design of technology, a forum for debate and reflection as well as an anchor point for many technology practitioners and academics programs. Submission are invited concerning any theoretical or pratical treatment of technology design, development and application (from various field of study such as: architecture, chemical, civil, electrical, industrial, material, and mechanical engineering). The subject of papers contributed may cover, but is not limited to: Discussion and exploration of new theory and knowledge of technology, innovation and sustainable development. Industrial and service management, product and process design, and performance improvement. Proficiency in the understanding technology design, development and application derived from experimental data analysis. Case studies reporting insights and best practices regarding technology design and development drawn from practices. Technology tools, techniques and other structured approaches to understand, measure, or provide value. Empirical observations resulting in original and significant conclusions or application papers in the above areas are also welcome.

 Join the conversation about this journal

Journal Cover Letter Templates

Op

American Journal Experts

 Quartiles


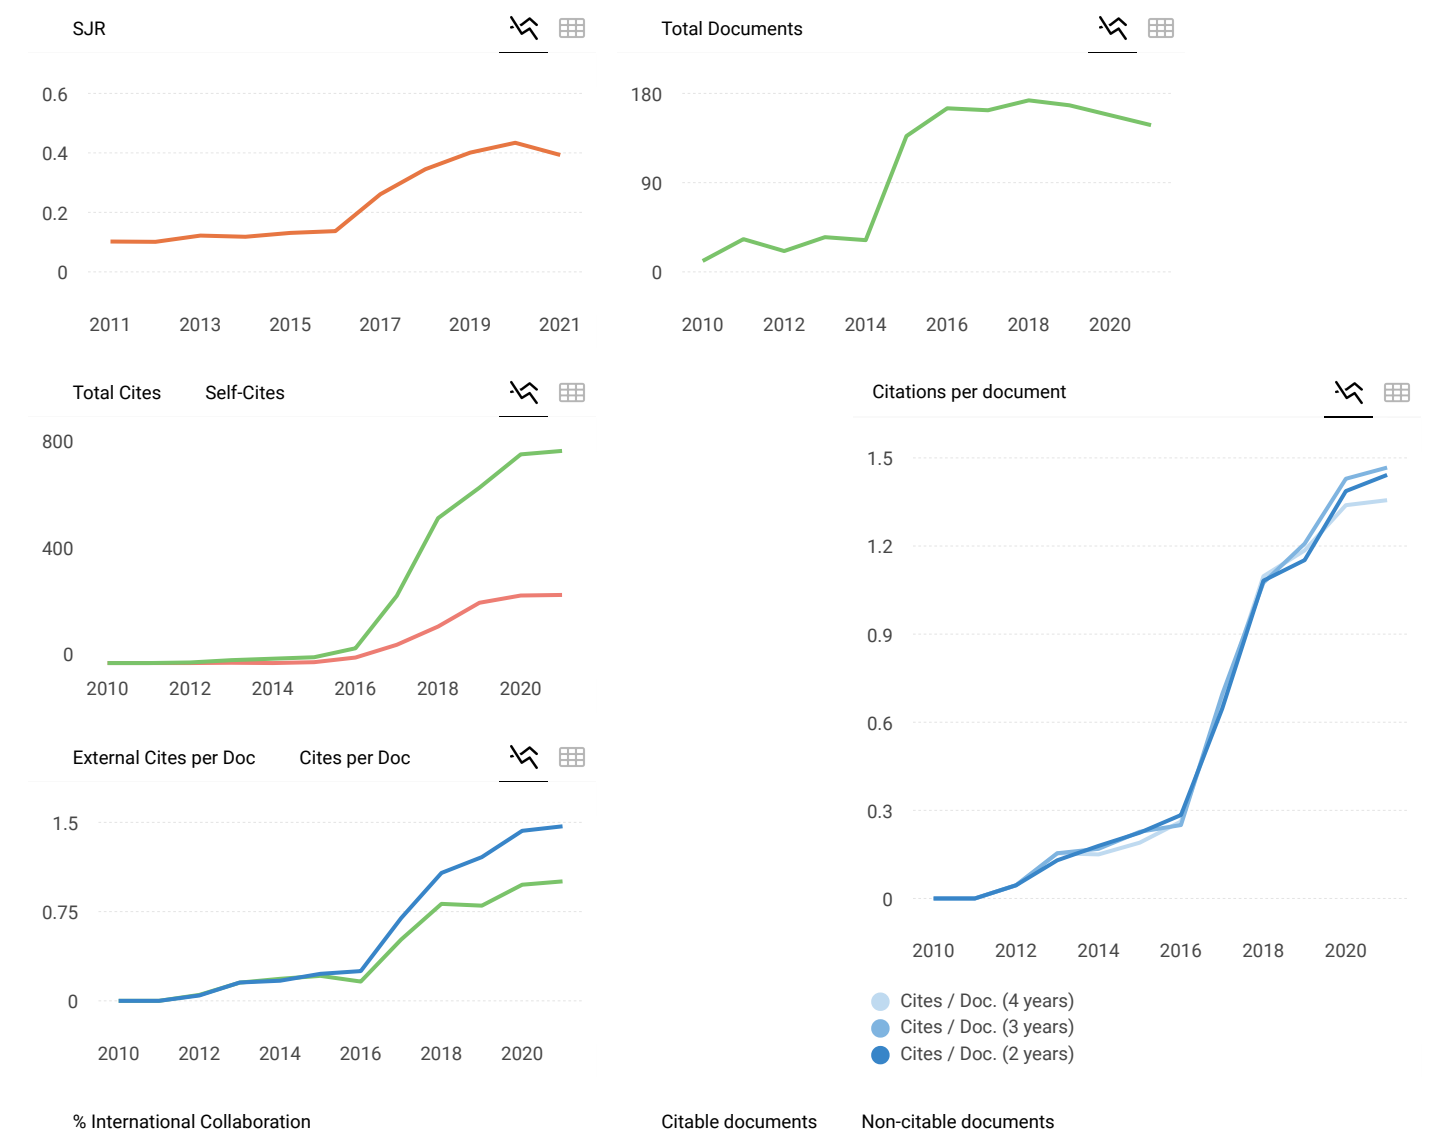
Journal Cover Letter Templates



Op

American Journal Experts

FIND SIMILAR JOURNALS ?


1 Environmental Progress and Sustainable Energy USA 17% similarity	2 Clean Technologies and Environmental Policy DEU 16% similarity	3 Renewable and Sustainable Energy Reviews GBR 15% similarity	4 Energy Sour Recovery, U GBR 1 s
--	--	---	---



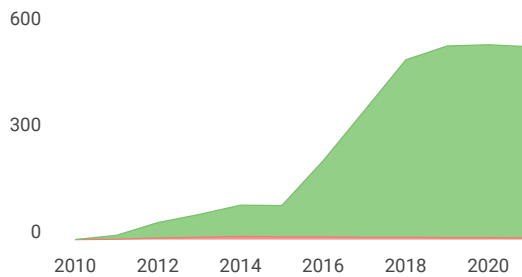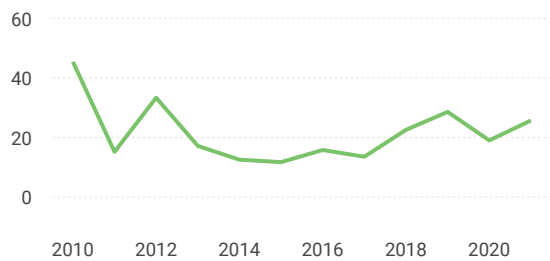

Cited documents

Uncited documents

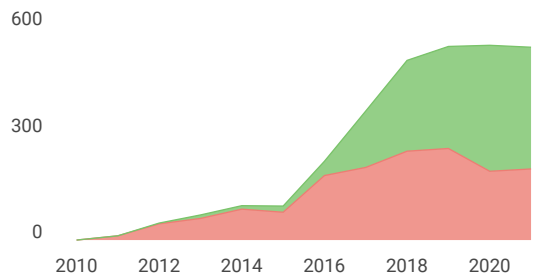

← Show this widget in your own website


Just copy the code below and paste within your html code:

```
<a href="https://www.scimaç"
```



Scimago Graphica

Explore, visually communicate and make sense of data with our [new data visualization tool](#).

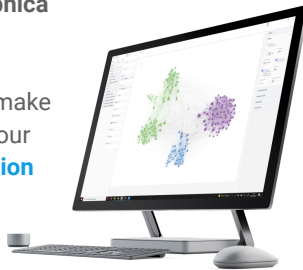

Journal Cover Letter Templates

Op

American Journal Experts

Metrics based on Scopus® data as of April 2022

F **Farida** 1 week ago

Hello, my name is Farida. I wanted to publish my article in your journal, I have an article at the intersection of economics and geology.

reply